
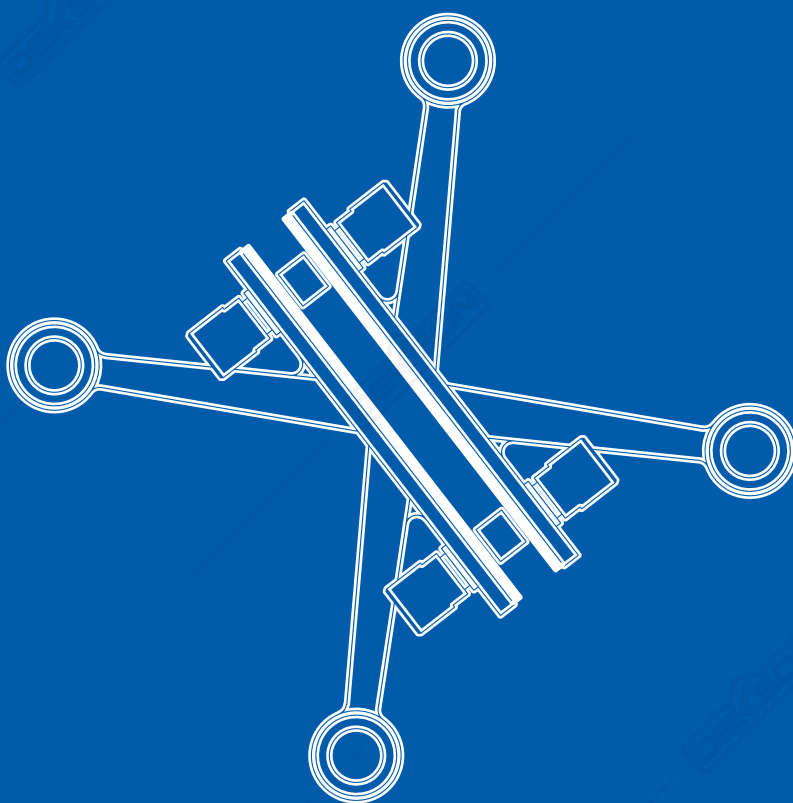
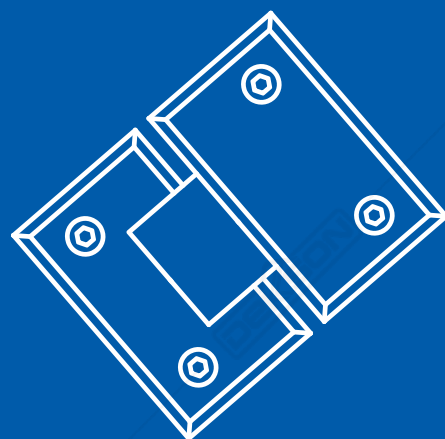


BROCHURE

---

Accessories for  
**GLASS**

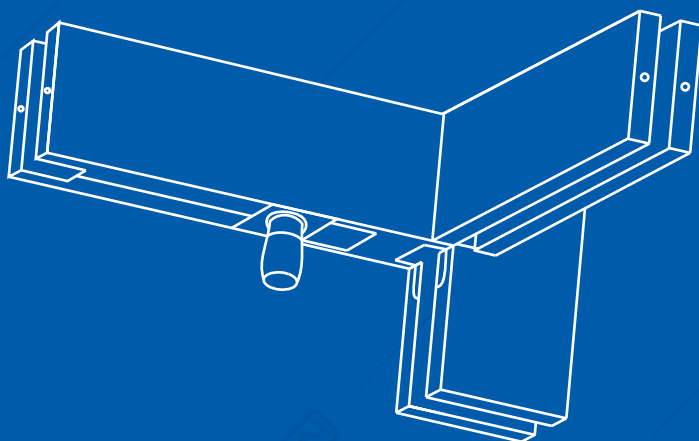

A modern office interior featuring glass partitions and doors. The space is bright and airy, with large windows on the left side. In the foreground, there is a light-colored wooden floor. In the background, there is a beige sectional sofa, a potted plant, and a round table with four chairs. The glass partitions are made of clear glass and are held together by metal frames. The ceiling is white with recessed lighting. The overall design is clean and professional.

## THE NEW MODERN LIFESTYLE OF GLASS **ACCESSORIES**

Dekkson glass door accessories provide high quality mechanism and years of warranty, ensuring an ongoing smooth operation. From the most private areas at your shower room to public areas, glass door inspires professionalism, transparency and prestige. Dekkson accessories is the perfect choice to support any kind of glass doors.



# Table of Contents :

## Glass Door

03

- 3 Hydraulic Patch Fitting
- 4 Patch Fitting
- 6 Floor Spring
- 8 Spider Fitting
- 14 Automatic Sliding Door
- 15 Sliding Glass Telescopic
- 17 Sliding Magtec
- 18 Hydraulic Soft Closer
- 19 Sliding Glass Door
- 21 Slide & Fold Glass Door
- 22 Pull Handle
- 24 Door Knob
- 25 Sliding Glass Lock & Glass Door Lock

## Shower Door

29

- 29 Shower Hinge
- 36 Sliding Shower

## Other Glass Accessories

40

- 40 Cubical System for Toilet / Shower
- 41 Cubical Toilet & Glass Holder
- 42 Glass Holder & Glass Clip
- 45 Advertising Fitting
- 47 Staircase Railing
- 49 Mohair
- 50 Clip Seal
- 51 Glass Suction
- 52 Silicone
- 54 Silicone Sausage & Silicone gun


DEKSON reserves the rights to change the design & technical specifications of the products or to make additions or improvements without any notification. If you must form a complete sets for engineering. Please contact the local distributor or our company to inquire about the accurate sizes, or measure according to the sizes of the object itself.

# HYDRAULIC PATCH FITTING

## Automatic Self-Closing Technology


Hydraulic patch fitting adds a convenient automatic self-closing function to your interior glass door.  
Hydraulic patch fitting is best used for indoor areas.

MATERIAL : COVER PLATE STAINLESS STEEL SUS 304





### PTH 1080 PSS

Glass Thickness : 8 mm ~ 12 mm  
Door Width : 800 mm (Max.)  
Door Weight : 80 kg (Max.)  
Self-closing when door is closed at 80°  
☀ +40° c ❄ -15° c

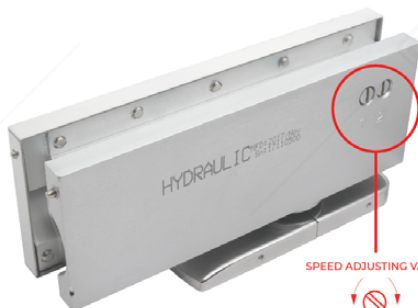

SPEED ADJUSTING VALVE

Fast Slow  
NO 1 : CLOSING SPEED  
NO 2 : LATCHING SPEED



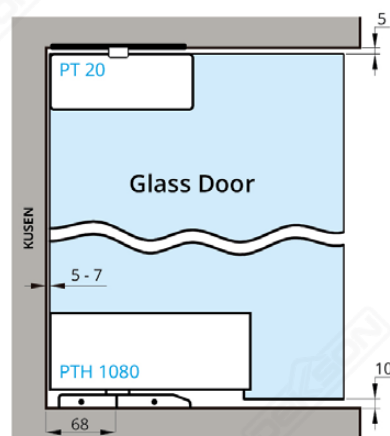


Tebal Kaca

8-13



### PTH 1100 PSS

Glass Thickness : 8 mm ~ 13 mm  
Door Width : 1000 mm (Max.)  
Door Weight : 100 kg (Max.)  
Self-closing when door is closed at 80°  
☀ +40° c ❄ -15° c

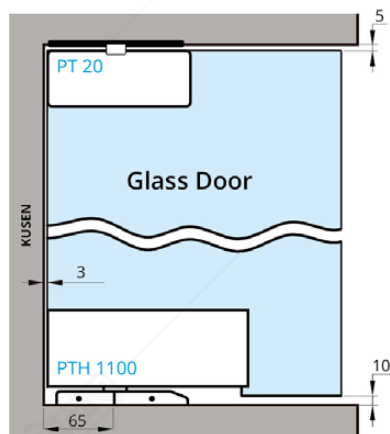


### Angle Adjustment Instruction

1. Unfasten all 6 screws (1, 2, 3, 4, 5, 6) using M5 Allen Key
2. Adjust the angle, then fasten all 6 screws (1, 2, 3, 4, 5, 6) tightly



# PATCH FITTING

MATERIAL : STAINLESS STEEL SUS 304

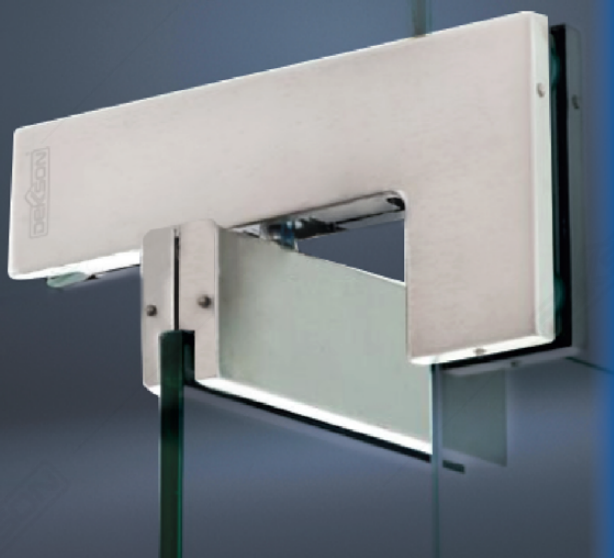

**PT 10 PSS**

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

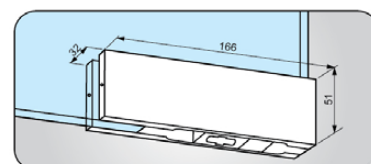

**PT 20 PSS**

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

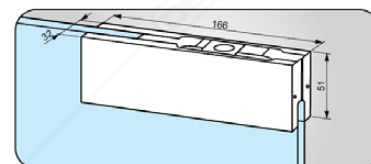

**PT 30 PSS**

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

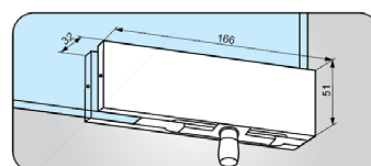

**PT 40 PSS**

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

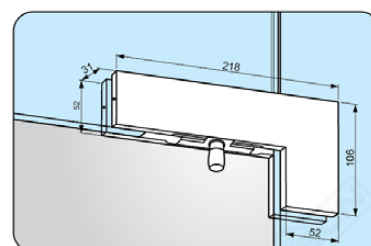





**PT 24 PSS**

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL




GUN METAL

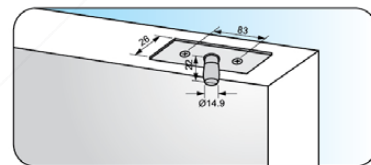

**PT 24 HD SSS**

**HEAVY DUTY**

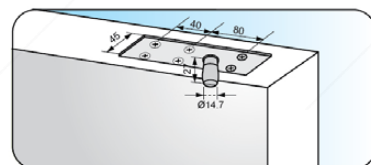


**US 10 PSS**

\*Cylinder to be ordered separately

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

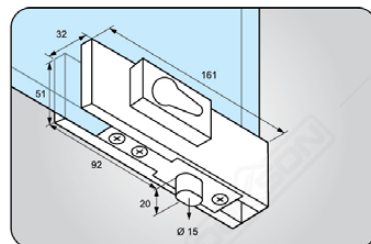


**PT 41 PSS LEFT**

\*Available in : Right



Available :



MATT BLACK

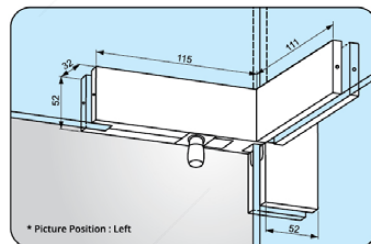

## ILLUSTRATIONS

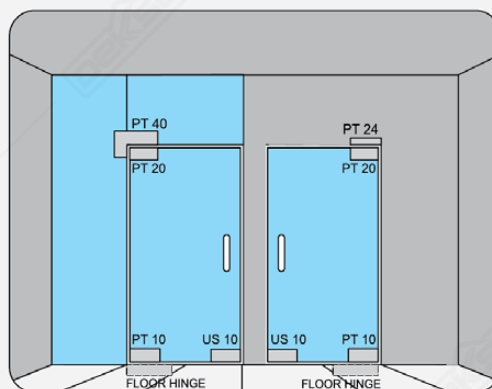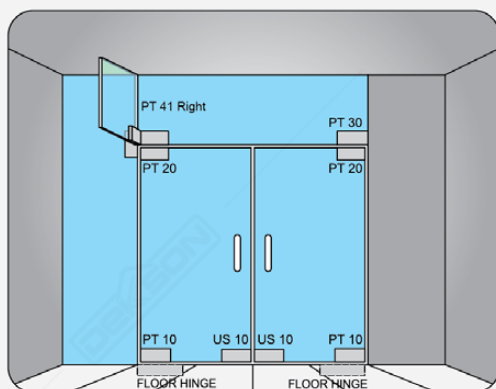

# FLOOR SPRING

## Certified for Optimum Operation

Floor Spring is the backbone of glass door in public facilities. Floor Spring has to withstand forces of natures such as wind, rain and storm, as well as performing hundreds to thousands of opening and closing movement everyday.

Dekkson floor spring is up to these tasks and its quality mechanism has been certified by PSB Singapore.



**MATERIAL : COVER PLATE STAINLESS STEEL SUS 304**



### FH 84 BLACK PEARL

Available : SSS

TITANIUM  
GUN METAL  
MATT BLACK

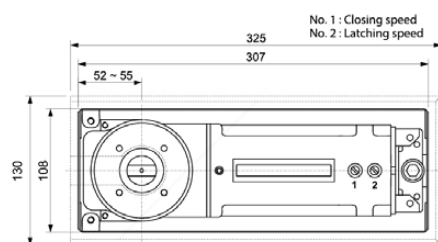

### SPECIFICATION :

| Type                     | Size   | Door Weight [Max] | Door Width [Max] |
|--------------------------|--------|-------------------|------------------|
| FH 211 SSS               | -      | 80 Kg             | 800 mm           |
| FH 84 SSS                | -      | -                 | -                |
| FH 84 BD SSS             | Normal | 100 Kg            | 900 mm           |
| FH 84 BD SSS w/o spindle | -      | -                 | -                |
| FH 8400 SSS              | Normal | 100 Kg            | 1000 mm          |
| FH 84 BD SSS             | 4      | 120 Kg            | 1100 mm          |
| FH 75 SSS                | -      | 150 Kg            | 1200 mm          |
| FH 75 BD SSS             | -      | -                 | -                |
| FH 80 SSS                | -      | 300 Kg            | 1500 mm          |
| FH 80 BD SSS             | -      | -                 | -                |

Accessories For Glass



FH 84 BD SSS (Body Only)




FH 84 BD SSS (w/o Spindle)

### SPINDLE



SPINDLE 3+10MM  
W/O FH 84+FH 80 SSS



SPINDLE 3+15MM  
W/O FH 84+FH 80 SSS






COMPATIBLE FOR FH 84 BD SSS W/O SPINDLE & FH 80 SSS  
\* SPINDLE CAN BE ORDER SEPARATELY

### FH 80 SSS

#### FEATURES :




- \* Adjustable Spring Tension from 20 Nm to 50 Nm
- \* Support door weight up to 300 kg
- \* Efficiency up to 80%
- \* Interchangeable spindle tips extensions up to 50 mm
- \* Swing speed from 180° to 15° latch speed from 15° to 0°
- \* Support door width 1500 mm

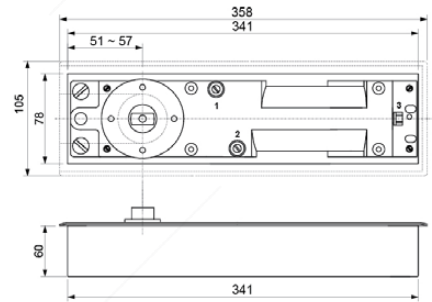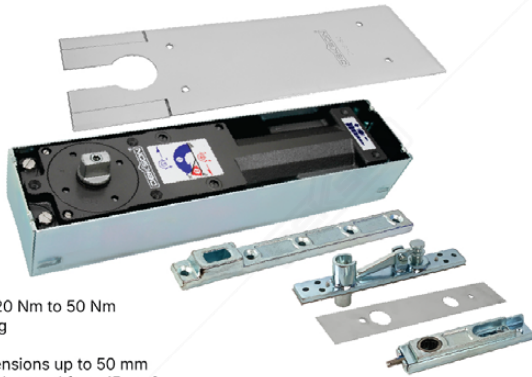

### FH 75 SSS

#### FEATURES :


- \* Support door weight up to 150 kg
- \* Support door width 1200 mm

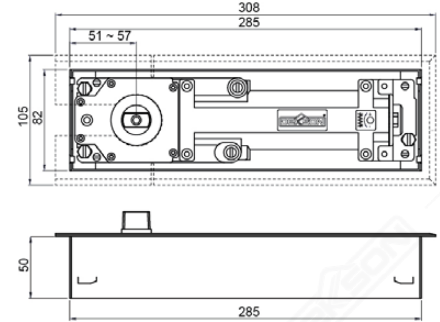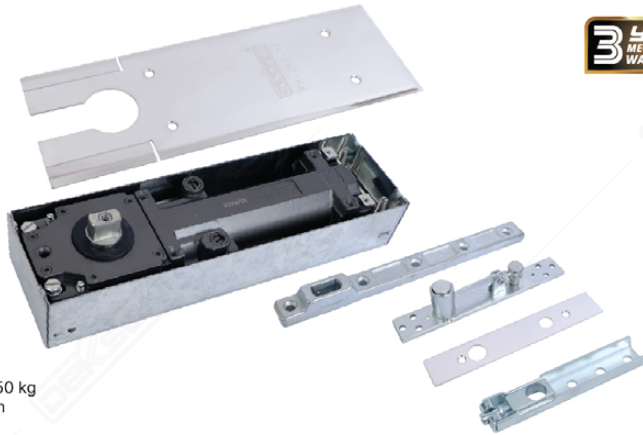

### FH 211 SSS

#### FEATURES :

- \* Support door weight up to 80 kg
- \* Support door width 800 mm

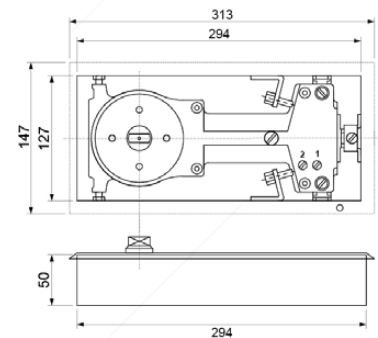

### FH 8400 SSS

FLOOR SPRING SET  
(FS + PF + US10 + CYL)




PT V24 PSS

PT V20 PSS

PT V10 PSS

US V10 PSS

#### ILLUSTRATIONS

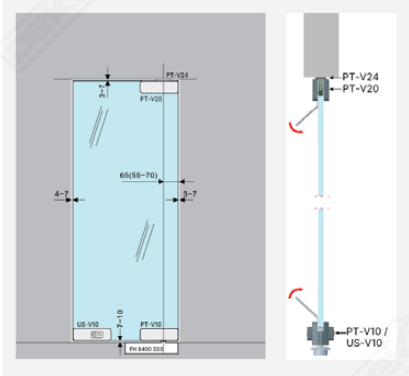



# SPIDER FITTING

## Formidable Support for Glass Structures



Glass structure as building exterior is an increasingly popular design trend. Dekkson spider fitting products are manufactured from high quality materials to ensure the safety and stability of glass structures. Dekkson spider fitting set can hold glass sheets that weighed up to 220 kilograms each.

MATERIAL : STAINLESS STEEL SUS 304



### 160 SERIES





**SF 8211**  
160MM SSS



**SF 8212**  
160MM SSS



**SF 8213**  
160MM SSS

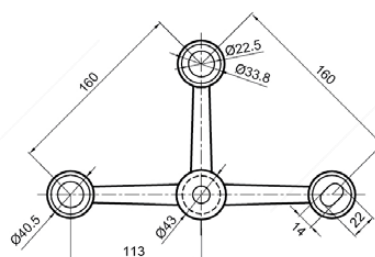



## 220 SERIES


### ILLUSTRATIONS

#### 160 SERIES



Capacity max : 170 Kg/ Glass sheet  
Glass Thickness : 10 - 15 mm

#### 220 SERIES



Capacity max : 220 Kg/ Glass sheet  
Glass Thickness : 10 - 25 mm

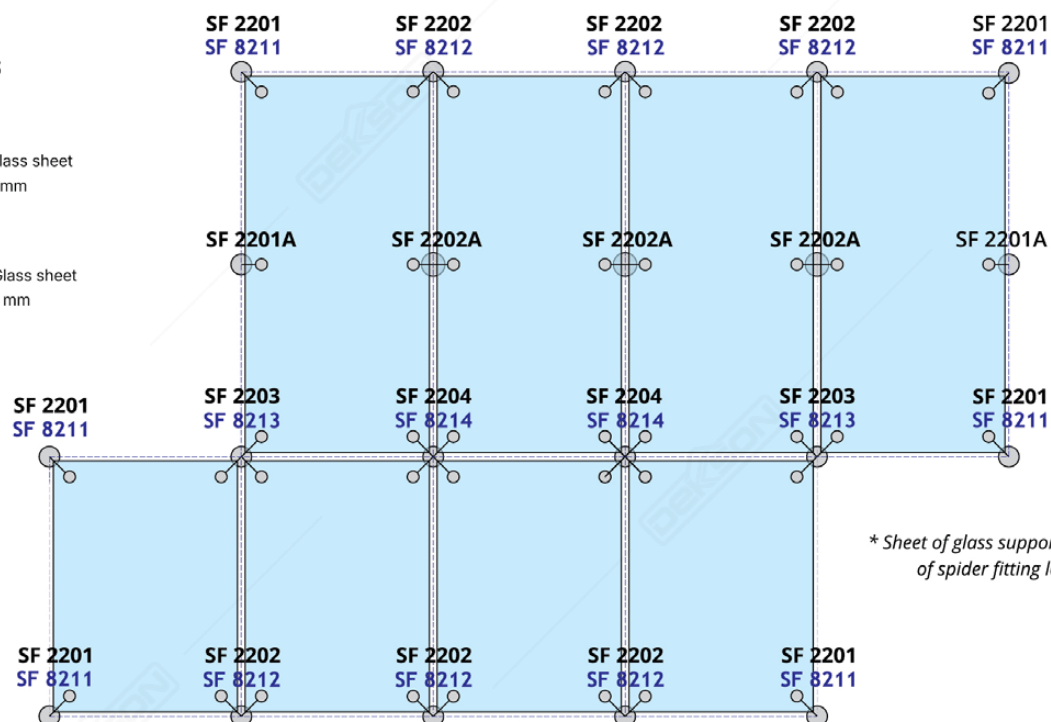



\* Sheet of glass supported by 4 pieces of spider fitting legs (4 Routels).



**SF 2201**  
220MM SSS





**SF 2201A**  
220MM SSS






**SF 2202 (90)**  
220MM SSS








**SF 2202A (180)**  
220MM SSS

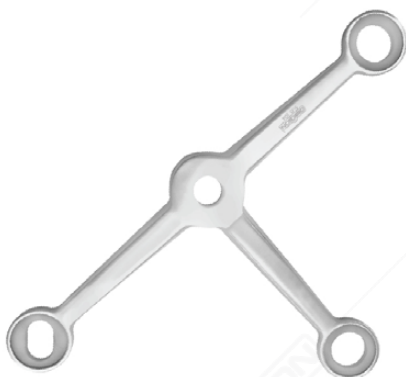


**SF 2203**  
220MM SSS



**SF 2204**  
220MM SSS

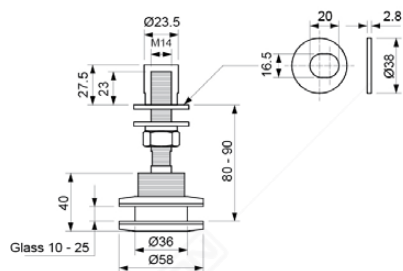


**SF 2241**  
220MM (ROUTEL) SSS



**SF 2245**  
220MM (BASE) SSS  
Material : Stainless Steel SUS 304 + Iron

## GG 220 SERIES

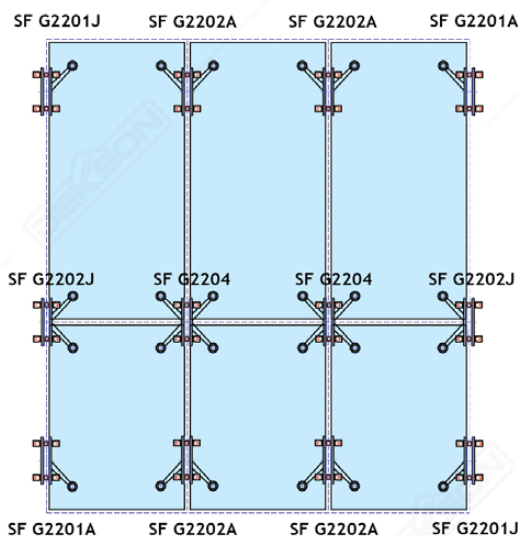

### ILLUSTRATIONS

Capacity (max) : 220 Kg / Glass sheet



Glass Thickness

- Structure : 18 - 35 mm
- Panel : 10 - 24 mm



\* Sheet of glass supported by 4 pieces of spider fitting legs (4 Routels).





**SF G2201A**  
GLASS STRC SSS





**SF G2201J**  
GLASS STRC SSS





**SF G2202A**  
GLASS STRC SSS






**SF G2202J**  
GLASS STRC SSS



**SF G2204**  
GLASS STRC SSS

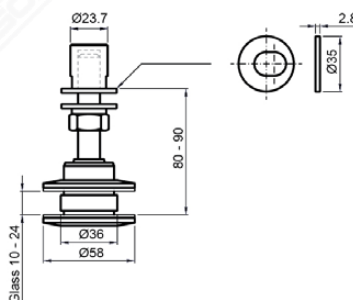

**SF G2241**  
GLASS ROUTEL STRC SSS

## KEY FOR SPIDER FITTING



ROUTEL SF 2241 PIN ATAS



BASE SF 2245 PIN ATAS




BASE SF 2245 PIN SAMPING



UNIVERSAL PIN ATAS




UNIVERSAL PIN SAMPING

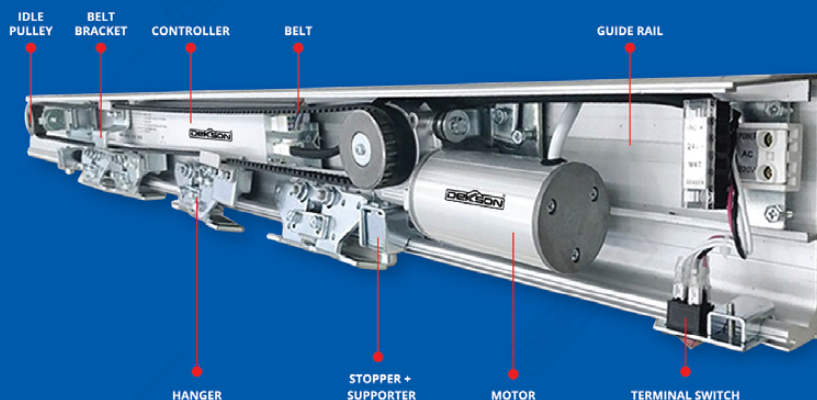

# SLIDING GLASS DOOR


## Automatic Sliding Door ASD - D120B

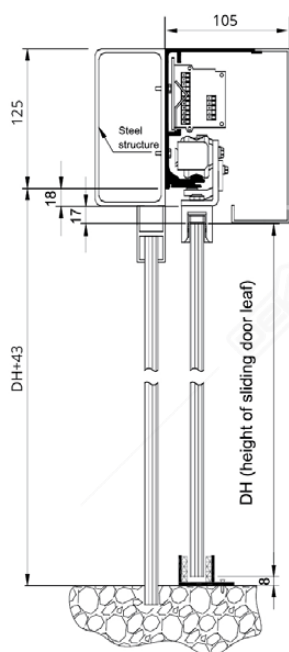

\*accessories can be ordered separately

### SPECIFICATION :

| Door leaf                       | Single leaf                    | Double leaves     |
|---------------------------------|--------------------------------|-------------------|
| Weight of door leaf             | Max. 150 kg                    | Max. 2 x 120kg    |
| Width of door leaf              | DW = 750 - 1600mm              | DW = 650 - 1050mm |
| Width of door opening           | W = Max. 1550mm                | W = Max. 2000mm   |
| Method of Installation          | Surface Installation           |                   |
| Supply power voltage            | AC 110-220V±10%, 50/60 Hz      |                   |
| Opening Speed                   | 150-460mm/s (adjustable)       |                   |
| Closing Speed                   | 130-460mm/s (adjustable)       |                   |
| Door hold-open time             | 0-8s (adjustable)              |                   |
| Manual open/close force         |                                |                   |
| Motor                           | DC 24 V, 60~70W(DC, brushless) |                   |
| Working Environment temperature | -20°C~50°C                     |                   |

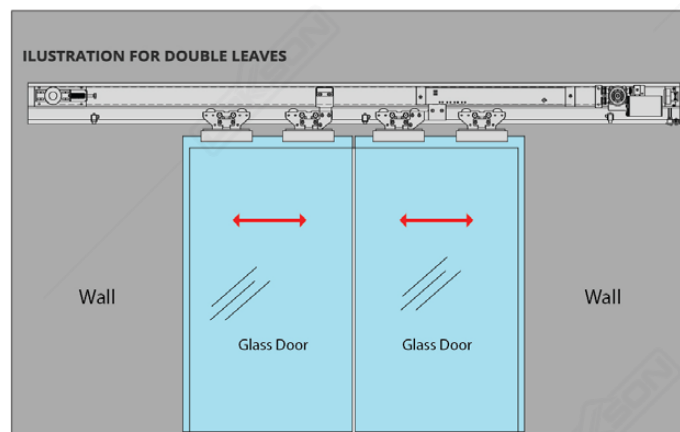





**LUG HOLDER**  
(1 pc)



**ROLLER**  
(6 pcs)



**STOPPER**  
(6 pcs)



**FLOOR GUIDE**  
(2 pc)



**FLOOR GUIDE FIX**  
Kaca 10mm (1 pc)  
Kaca 12mm (1 pc)



**SINGLE HOLE LUG**  
(2 pc)



**DOUBLE HOLE LUG**  
(2 pc)



**STEEL ROPE**  
**Ø1.5mm X 2.5m**  
(2 pcs)



**HYDRAULIC DAMPER**  
(3 pcs)



**GLASS CLIP GLASS DOOR 1**  
(2 pairs)




**GLASS CLIP GLASS DOOR 2**  
(1 pairs)



**SLIDING LOCK (1 set)**

**TRACK FOR SGT 4100 (3+1) NA + COVER**

\*Track & Cover to be order separately

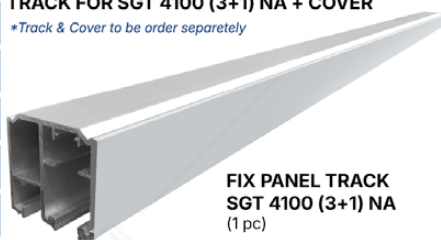

**FIX PANEL TRACK**  
**SGT 4100 (3+1) NA**  
(1 pc)



**DOOR PANEL TRACK**  
**SGT 4100 (3+1) NA**  
(2 pc)





**COVER TRACK**  
**SGT 4100 (3+1) NA**  
(2 pcs)

## ILLUSTRATIONS

Glass Thickness:  
10-12 mm

Weight Glass Door / leaf :  
80 kg

Width Opening:  
4000 mm

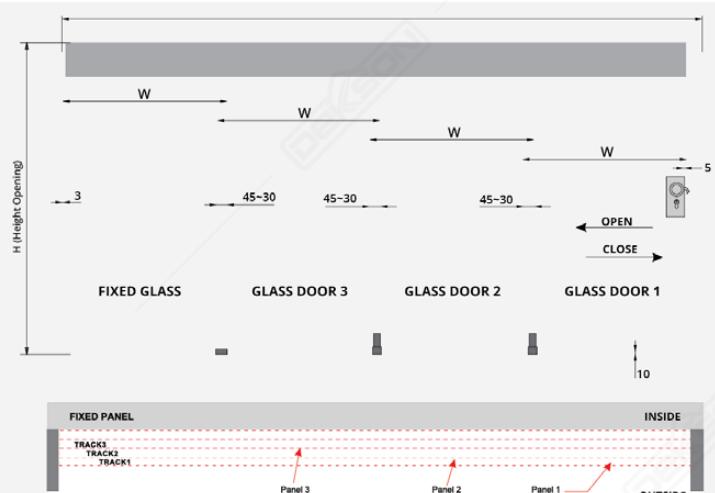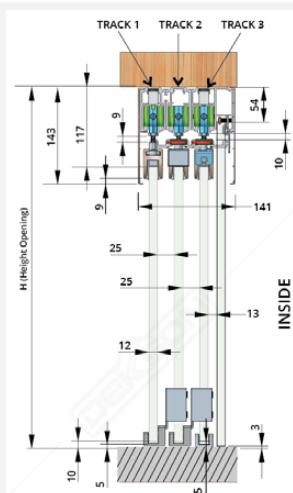

# SLIDING GLASS TELESCOPIC

## SGT 3100 (2+1)



**LUG HOLDER**  
(1 pc)



**ROLLER**  
(4 pcs)



**STOPPER**  
(4 pcs)



**FLOOR GUIDE**  
(1 pc)



**FLOOR GUIDE FIX**  
Kaca 10mm (1 pc)  
Kaca 12mm (1 pc)



**SINGLE HOLE LUG**  
(1 pc)



**DOUBLE HOLE LUG**  
(1 pc)



**STEEL ROPE**  
Ø1.5mm X 2.5m



**HYDRAULIC DAMPER**  
(2 pcs)



**GLASS CLIP GLASS DOOR 1**  
(1 pairs)




**GLASS CLIP GLASS DOOR 2**  
(1 pairs)



**SLIDING LOCK (1 set)**

### TRACK FOR SGT 3100 (2+1) NA + COVER

\*Track & Cover to be order separately

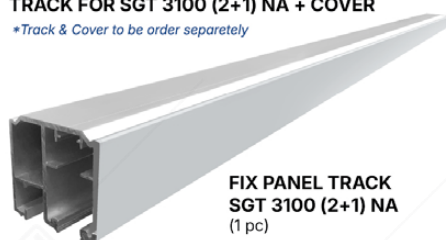

**FIX PANEL TRACK**  
SGT 3100 (2+1) NA  
(1 pc)



**DOOR PANEL TRACK**  
SGT 3100 (2+1) NA  
(1 pc)





**COVER TRACK**  
SGT 3100 (2+1) NA  
(2 pcs)

### ILLUSTRATIONS

Glass Thickness:  
10-12 mm

Weight Glass Door / leaf :  
80 kg


Width Opening:  
3000 mm

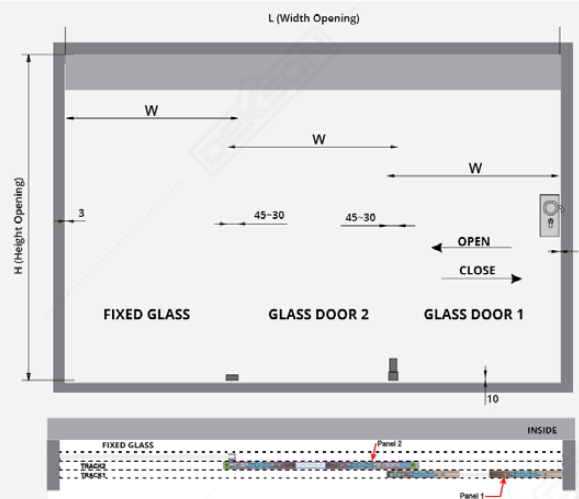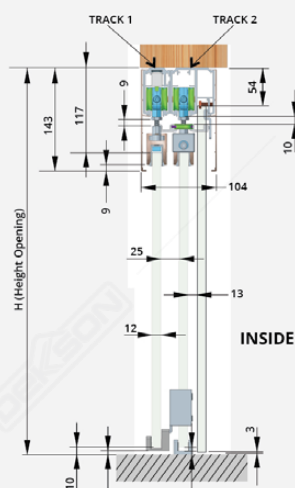

# SLIDING GLASS DOOR

Deluxe Magtec SD12 ACC SSS


MATERIAL : STAINLESS STEEL SUS 304

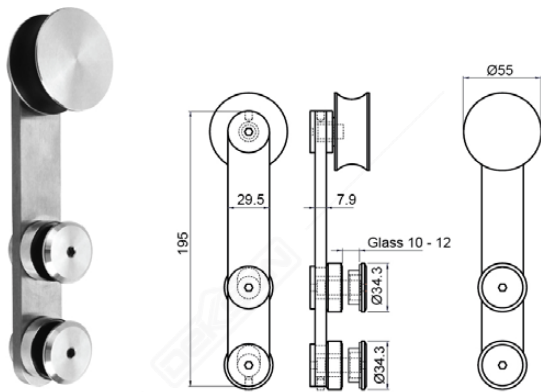

**ROLLER FOR TUBE**  
(2 pcs)




**TUBE COVER**  
(2 pcs)

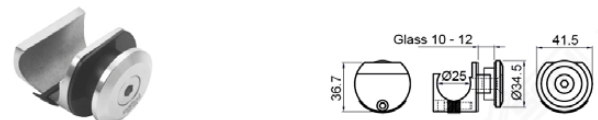


**TUBE CONNECTOR (GG)**  
(4 pcs)



**FLOOR GUIDE**  
(1 pc)

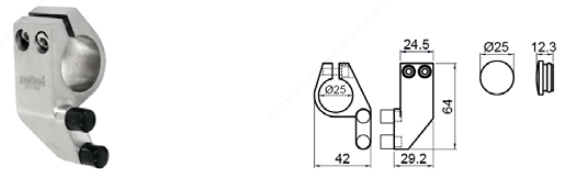

**STOPPER (LEFT/RIGHT)**  
(2 pcs)

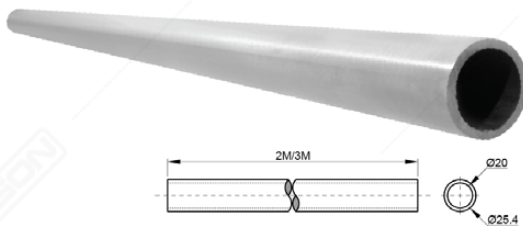

**TUBE**






**TUBE CONNECTOR**  
ACC SD 204 (GW)

*\*to be ordered separately*

## ILLUSTRATIONS

Capacity (max):  
65 Kg / Glass sheet


Glass Thickness:  
10 - 12 mm

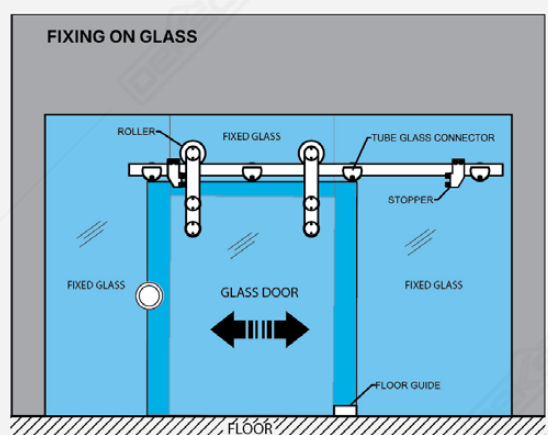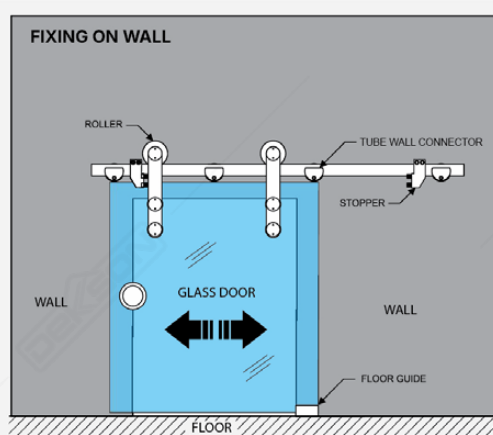



# SLIDING GLASS DOOR


Hydraulic Soft Closer  
SLD HYD8970A SSS

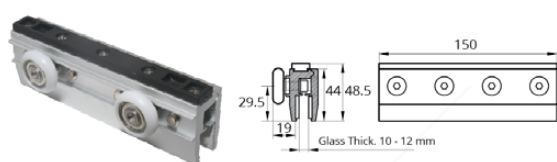

**CLAMP ROLLER**  
(2 pcs)




**END CAP**  
(2 pcs)




**DOOR HANDLE**  
(1 pc)



**SOFT CLOSER**  
(2 pcs)




**FLOOR GUIDE 10 MM**  
(1 pcs)




FLOOR GUIDE GLASS 10 MM




**FLOOR GUIDE 12 MM**  
(1 pcs)



FLOOR GUIDE GLASS 12 MM

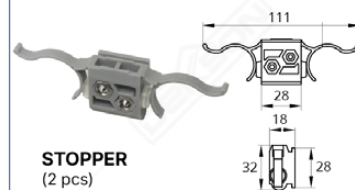


**STOPPER**  
(2 pcs)


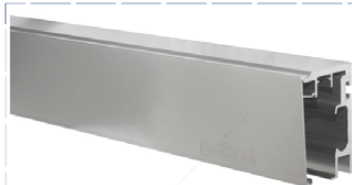


**TRACK SLD HYD8970A 2.2 M SAT + COVER**  
Material : Aluminium

Available :  
TRACK SLD HYD8970A 3 M SAT + COVER  
TRACK SLD HYD8970A 4.2 M SAT + COVER



**GLASS CLAMP**  
FOR TRACK HYD8970A PSS





\*to be ordered separately



## ILLUSTRATIONS

Capacity (max) : 120 kg  
Glass Thickness : 10 - 12 mm

### Fixing On WALL

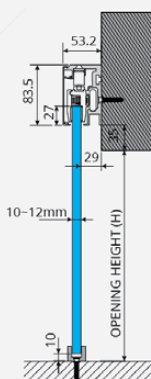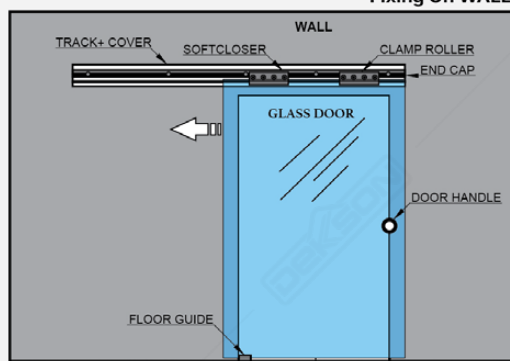


### Fixing On glass

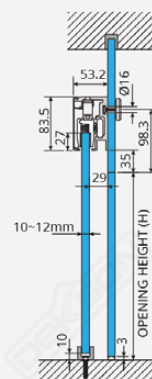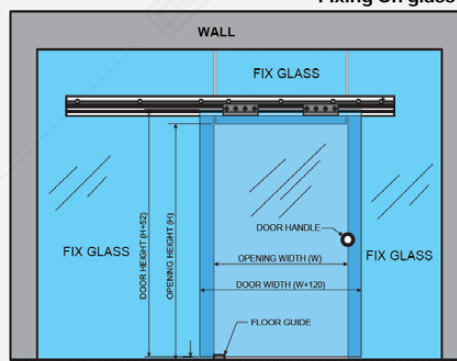



## SLIDING GLASS DOOR


### L4 SGD ACC L4 8207A SET

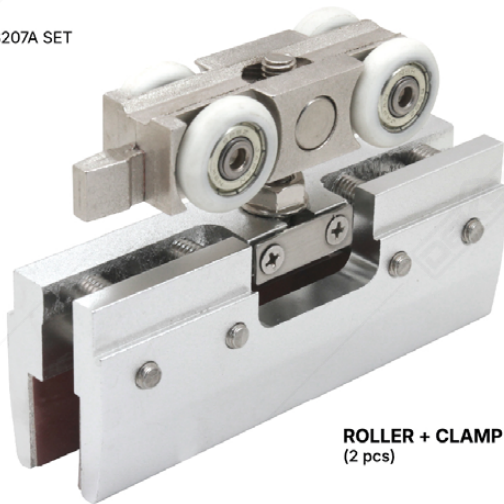

**ROLLER + CLAMP**  
(2 pcs)



**STOPPER**  
(2 pcs)






**FLOOR GUIDE  
INSET 10 MM**  
(1 pc)



**FLOOR GUIDE**  
(1 pc)



**FLOOR GUIDE  
INSET 12 MM**  
(1 pc)

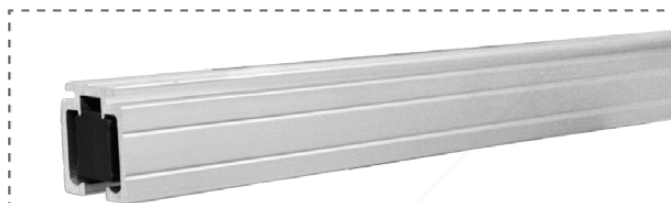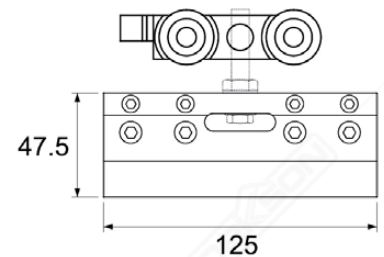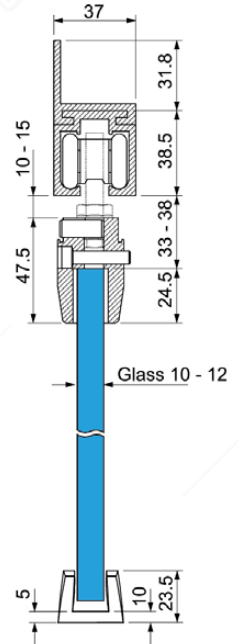


#### SR D6 Track 2M / 3M

\* to be ordered separately.

Track : 2000 / 3000 mm  
Max. Capacity : 100 Kg  
Glass Thickness : 10 mm - 12 mm

| Type | Max. Capacity | Glass thickness | Track        |
|------|---------------|-----------------|--------------|
| L4   | 100 kg        | 10 - 12 mm      | 2000/3000 mm |


### L6 SGD ACC 8922-57 COMPLETE SET

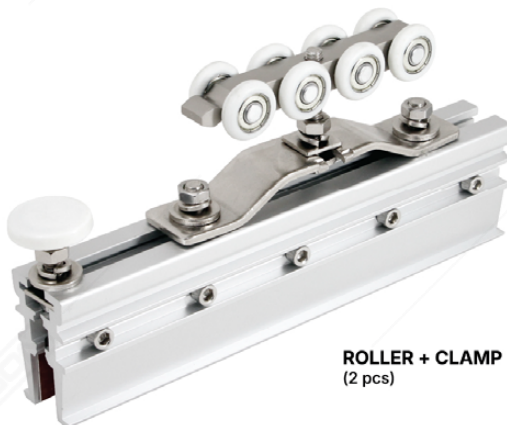

**ROLLER + CLAMP**  
(2 pcs)



**STOPPER**  
(2 pcs)






**FLOOR GUIDE  
INSET 10 MM**  
(1 pc)



**FLOOR GUIDE**  
(1 pc)



**FLOOR GUIDE  
INSET 12 MM**  
(1 pc)

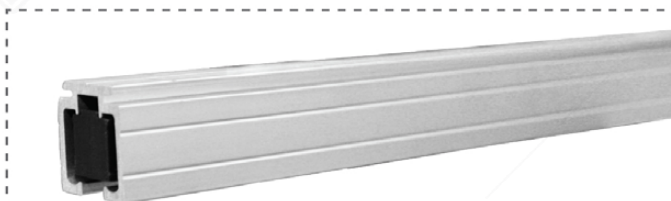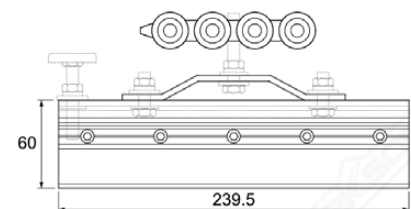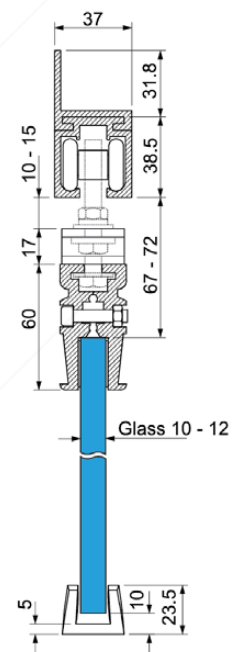

#### SR D6 Track 2M / 3M

\* to be ordered separately.


Track : 2000 / 3000 mm  
Max. Capacity : 150 Kg  
Glass Thickness : 10 mm - 12 mm

| Type | Max. Capacity | Glass thickness | Track        |
|------|---------------|-----------------|--------------|
| L6   | 150 kg        | 10 - 12 mm      | 2000/3000 mm |

**S6**  
SGD ACC 8922-63 COMPLETE SET



**ROLLER + CLAMP**  
(2 pcs)

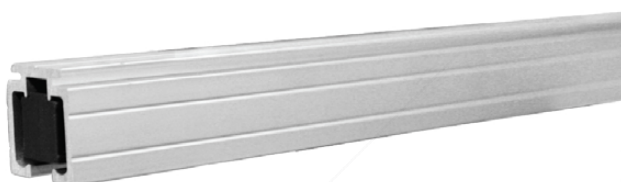

**SR D6 Track 2M / 3M**


*\* to be ordered separately.*

Track : 2000 / 3000 mm  
Max. Capacity : 150 Kg  
Glass Thickness : 10 mm - 12 mm

| Type | Max. Capacity | Glass thickness | Track        |
|------|---------------|-----------------|--------------|
| S6   | 120 kg        | 10 - 12 mm      | 2000/3000 mm |



**STOPPER**  
(2 pcs)





**FLOOR GUIDE INSET 10 MM**  
(1 pc)




**FLOOR GUIDE**  
(1 pc)




**FLOOR GUIDE INSET 12 MM**  
(1 pc)

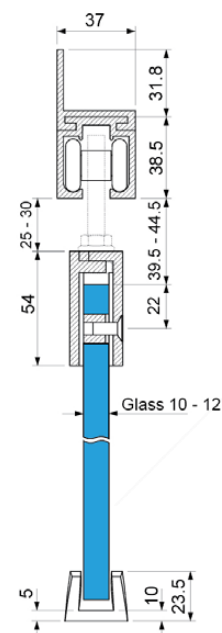

**SR 89-2280-4RD SSS SET**

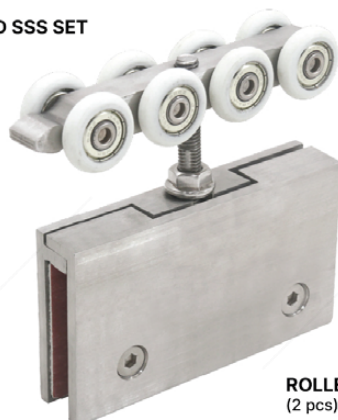

**ROLLER + CLAMP**  
(2 pcs)

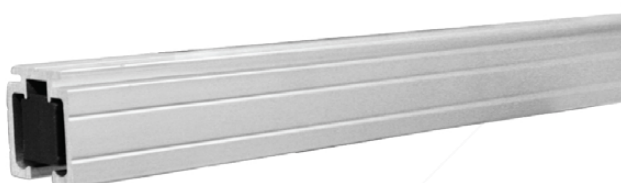

**SR D6 Track 2M / 3M**


*\* to be ordered separately.*

Track : 2000 / 3000 mm  
Max. Capacity : 200 Kg  
Glass Thickness : 10 mm - 12 mm

| Type           | Max. Capacity | Glass thickness | Track        |
|----------------|---------------|-----------------|--------------|
| SR 89 2280-4RD | 200 kg        | 10 - 12 mm      | 2000/3000 mm |



**STOPPER**  
(2 pcs)





**FLOOR GUIDE INSET 10 MM**  
(1 pc)



**FLOOR GUIDE**  
(1 pc)



**FLOOR GUIDE INSET 12 MM**  
(1 pc)

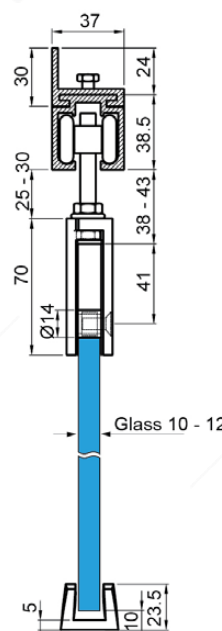

# SLIDE & FOLD GLASS DOOR

**SLF 8610**

MATERIAL : STAINLESS STEEL SUS 304



## TOP ROLLER & TOP PIVOT HINGE



PV 861020 SSS



RH 86103 SSS



NH86102 SSS



RH 86102 SSS



RH 86101 SSS

## BOTTOM HINGE & LOCK BOLT HINGES & BOTTOM PIVOT HINGE



PV 861010 SSS



LH 861030 SSS



LH 86102 SSS



GH 861040 SSS



GH 8610401 SSS



LH86101 SSS



**DP 89001WS SSS**  
BOLT KEEPER WITH DUST PROOF



**TRACK 5,8M NA**  
Available : 2 M  
3,8 M




**U-CHANNEL**  
19.5x19.5x1.8x4.5M NA  
Available : 19.5x19.5x1.8x2.25 M



**DYNASET M8X30+  
BOLT M8X20**

## ILLUSTRATIONS

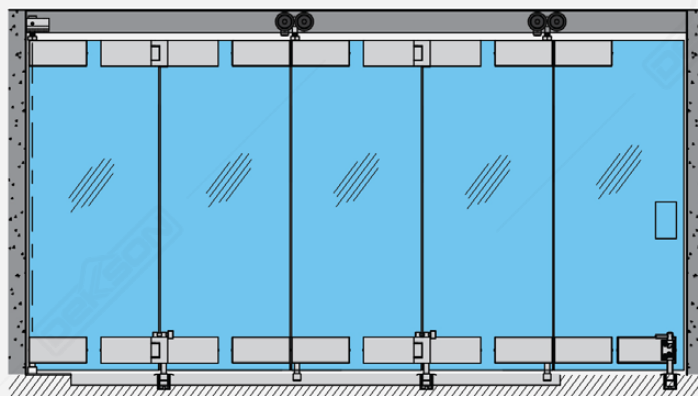

Height Max : 2700 mm  
Width Max : 800 mm  
Glass Thickness : 10 mm & 12 mm  
Weight Max : 65 kg / panel  
Max. Leaf per set : 7 panel




# PULL HANDLE

## Quality Design and Quality Finishing

With simplistic design and a quality finishing, Dekkson pull handle for glass door blend well with the overall style of modern glass doors. Dekkson pull handle for glass door is manufactured from stainless steel SUS 304 its quality will enhance glass doors aesthetic and function.



**PH DL804**  
32x332x300 PSS  
Material : SUS 304




**PH DL809**  
32x382x350 PSS  
Available in :  
25x225x200 PSS  
32x332x300 SSS  
32x332x300 PSS  
32x382x350 SSS  
Material : SUS 304




**PH DL809**  
32x382x350 WHITE  
Available in :  
25x325x300 WHITE  
Material : SUS 304




**PH DL809**  
32x382x350 MATT BLACK  
Available in :  
25x325x300 MATT BLACK  
Material : SUS 304




**PH DL810**  
38x600x400 PSS+SSS  
Available in :  
38x800x600 PSS+SSS  
38x1000x800 PSS+SSS  
Material : SUS 304

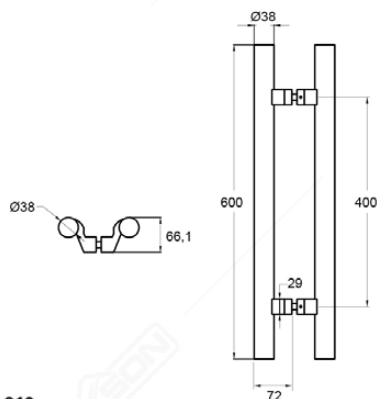

**PH DL441**  
20x38x600x425 PSS+SSS  
Available in :  
20x38x800x625 PSS+SSS  
Material : SUS 304

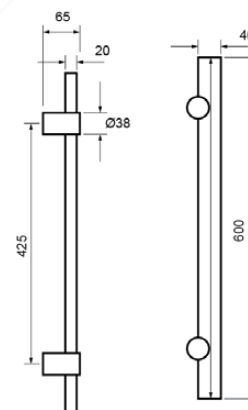



#### PH DL446


32x600x400 SSS

Available in :

32x400x250 SSS

32x800x600 SSS

Material : SUS 304



#### PH DL1831

25X500X235 PSS+SSS

Available in :

32X500X235 PSS+SSS

Material : SUS 304


#### PH DL814 SQ

25X25X(525/225)X(500X200) PSS

Available in :

19X19X(519/219)X(500X200) PSS

Material : SUS 304

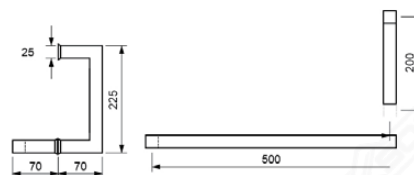

#### PH DL814

25X(475/175)X(450X150) PSS

Available in :

25X(525/225)X(500X200) PSS


Material : SUS 304



#### PH DL814

25X(475/175)X(450X150) MATT BLACK


Material : SUS 304



#### PH DL814

25X(525/225)X(500X200) GM

Material : SUS 304

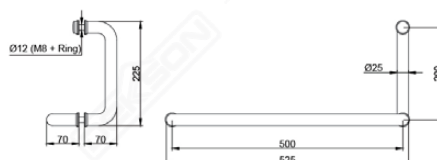


#### PH SQ 12X12X619X600 + 830 BR

Profile Dimension : 12X12 mm

Available :

Chrome Polish, Brush Gun Metal, Satin Brass

Material : Brass

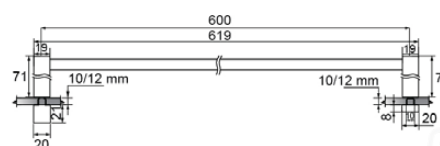

# DOOR KNOB

## Grip and Slide


Dekkson offer various design for glass door knob, but in general it has a minimalistic-modern design. It is a perfect fit for seamlessly styled contemporary building. And just like every other products from Dekkson, it has a highly dependable quality.



**DK AL 82801 CP**  
Material : Aluminium




**DK AL 82801 MATT BLACK**  
Material : Aluminium



**DK AL 82803 CP**  
Material : Aluminium




**DK AL 82803 MATT BLACK**  
Material : Aluminium




**DK AL 82808 CP**  
Material : Aluminium




**DK AL 82808 MATT BLACK**  
Material : Aluminium



**DK 8716 58 MM SSS**  
Material : Stainless Steel SUS 304



**DK 830 BR**  
Available :  
Chrome Polish, Brush Gun Metal, Satin Brass  
Material : Brass





# SLIDING GLASS LOCK & GLASS DOOR LOCK


Security, alongside of aesthetic and functionality, is an essential element that must not be neglected on doors. Dekkson glass lock variants are assembled from high quality materials, exhibiting both dependable mechanism and fine design.



## SGL 7600 SUS 304 (GW) SSS

Material : Stainless Steel SUS 304

\* Cylinder DC DL 55 mm SN to be ordered separately

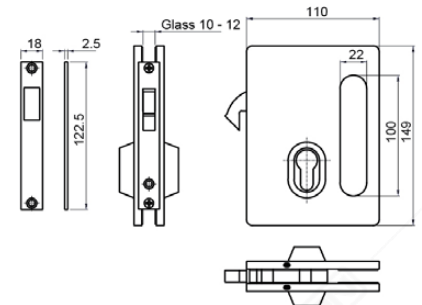


10-12 mm glass thickness



## SGL 7601 SUS 304 (GG) SSS

Material : Stainless Steel SUS 304

\* Cylinder DC DL 55 mm SN to be ordered separately

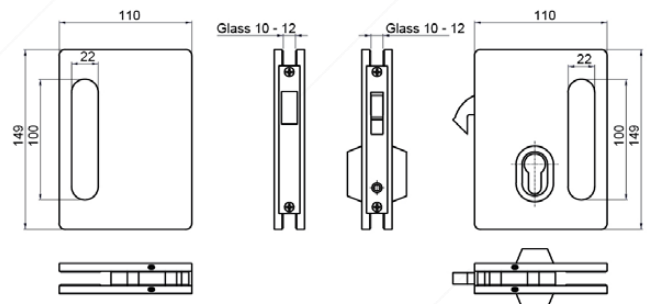


10-12 mm glass thickness



## SGL 8656 (GW) SSS

Material : Stainless Steel SUS 304


\* Cylinder to be ordered separately

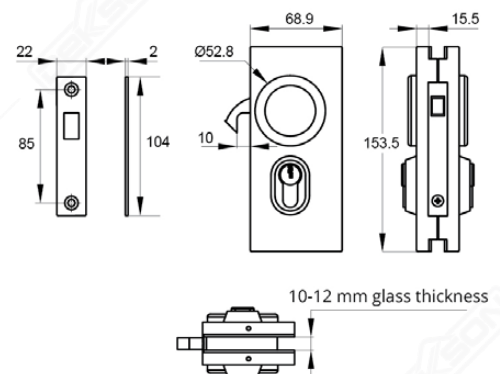


10-12 mm glass thickness




**SGL 8656 (GG) SSS - KEEPER**  
Material : Stainless Steel SUS 304




**SGL 8656 (GG) SSS FIX - KEEPER**  
Material : Stainless Steel SUS 304

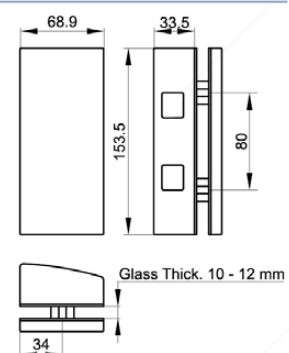


**GDL 38225 PSS**



**GDL 38225A PSS**




**GDL 38231 PSS**

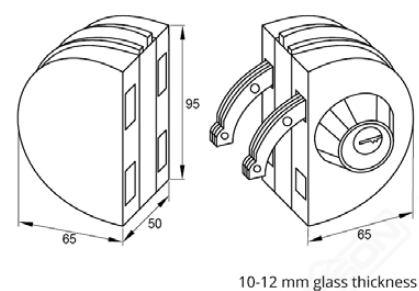




**GDL 8037D (GW) SSS**

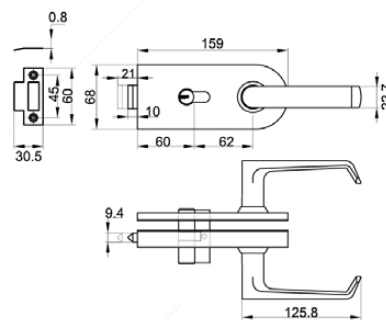

Glass Thick. 10 - 12 mm




**GDL 8037D (GG) SSS - KEEPER**



Glass Thick. 10 - 12 mm




**GL 8600C CP**

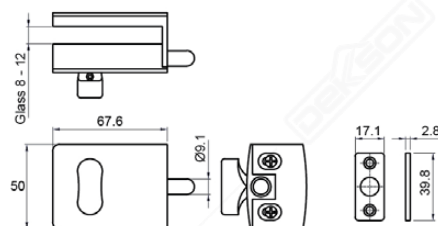

8-12 mm glass thickness




**8601C CP KEEPER**



8-12 mm glass thickness




**IL 8620 CP**

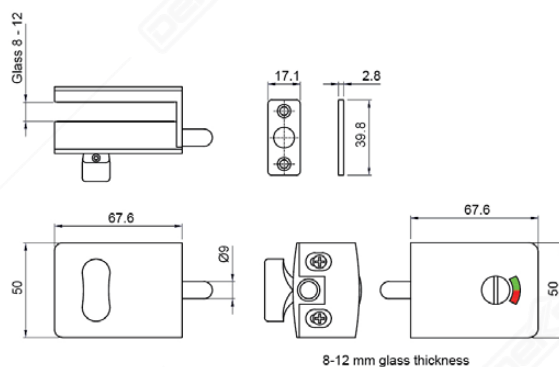


8-12 mm glass thickness



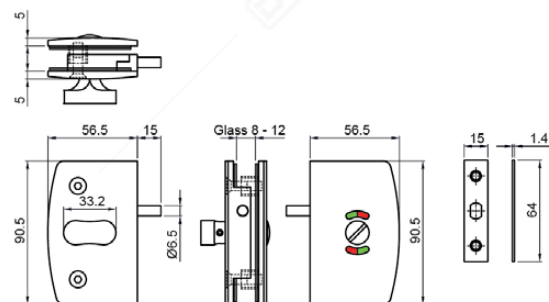


IL 8800 GW CP

8-12 mm glass thickness

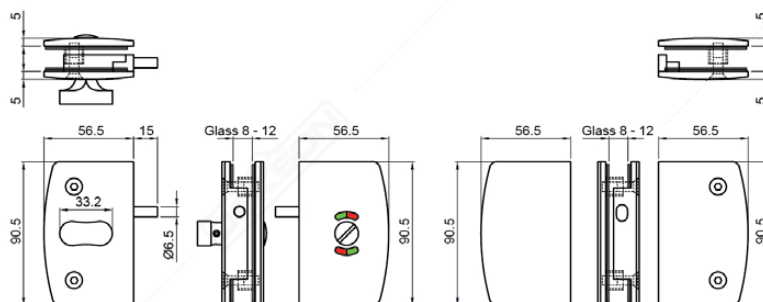


IL 8801 GG CP


8-12 mm glass thickness

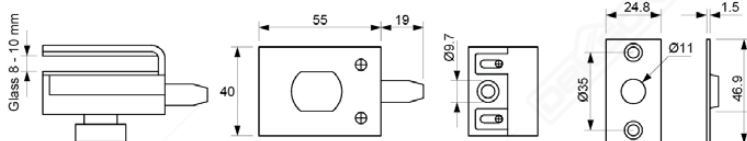


GL 621 CP



GL 621-1 CP

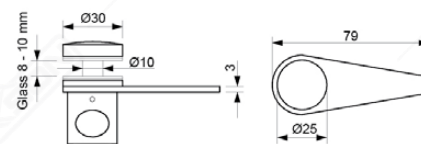

GL 622 CP



GL 622-1 CP


# SHOWER DOOR

## Stay Clean, Stay Comfortable

Modern shower room design usually separate dry areas and wet areas using glass separators. Dekkson shower door accessories support the glass elements in shower room to create a satisfyingly aesthetic and convenient personal area in houses and apartments. Dekkson present various shower hinges and sliding shower door sets, all of which has high dependability and value for money.




## SHOWER HINGE HYDRAULIC

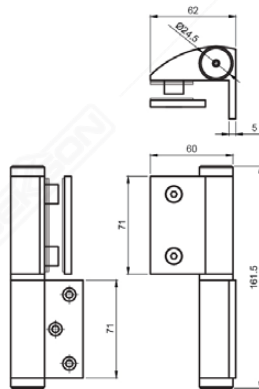


### SHH 502 MATT BLACK (GLASS TO WALL)

Available : • Left Out • Right Out  
• Left In • Right In

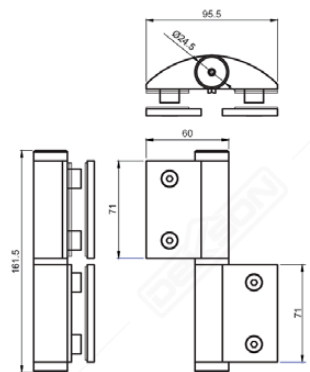


### SHH 503 MATT BLACK (GLASS TO GLASS)

Available : • Left  
• Right

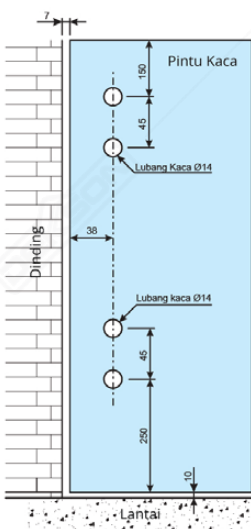


#### ILLUSTRATIONS


##### OPEN OUTSIDE



##### OPEN INSIDE




Material : Aluminium  
Glass Thickness : Min. 8-12 mm  
Max. Door Weight : 60 kg / pairs  
Max. Door Height : 2000 mm  
Max. Door Width : 900 mm  
Max. Door Opening : 150°  
Hold Open : 90°  
Adjust Speed & Power

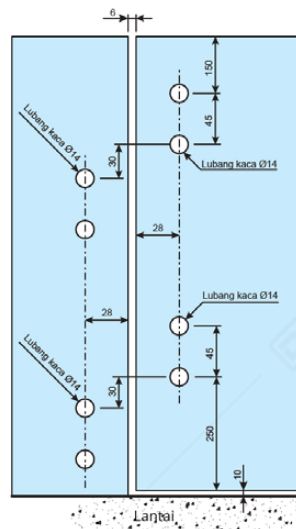


#### ILLUSTRATIONS

##### OPEN OUTSIDE



##### OPEN INSIDE



Material : Aluminium  
Glass Thickness : Min. 8-12 mm  
Max. Door Weight : 60 kg / pairs  
Max. Door Height : 2000 mm  
Max. Door Width : 900 mm  
Max. Door Opening : 150°  
Hold Open : 90°  
Adjust Speed & Power

#### CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat  
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan



• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan  
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat

#### CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat  
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan



• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan  
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat



## SHOWER HINGE HYDRAULIC 88 SERIES

**SOFT CLOSE**





**SSH 8801 (GW) PSS**  
Glass to wall hinge

Material : SUS 304  
Door Thickness : 8 - 12 mm  
Capacity Max : 45 Kg / pairs

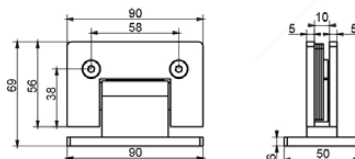

**SSH 8803 (GG) PSS**  
Glass to Glass hinge

Material : SUS 304  
Door Thickness : 8 - 12 mm  
Capacity Max : 45 Kg / pairs

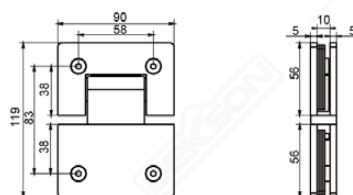



## SHOWER HINGE LUXURIOUS - S SERIES

**LUXURIOUS  
SERIES**





**LSH S9801 (GW) 90°  
CHROME POLISH**  
Available : • Satin Brass  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 65 Kg / pairs

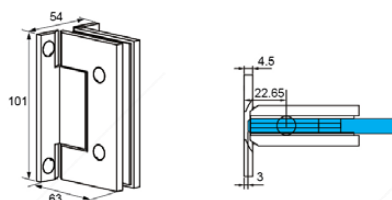



**LSH S9802 (GW) 90°  
BRUSH GUN METAL**  
Available : • Satin Brass  
• Chrome Polish

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 65 Kg / pairs

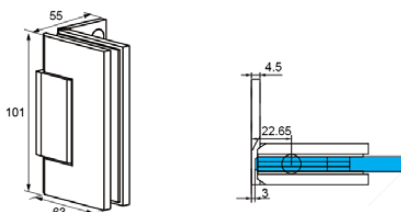

**LSH S9803 (GG) 180°  
SATIN BRASS**  
Available : • Brush Gun Metal  
• Chrome Polish

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 65 Kg / pairs



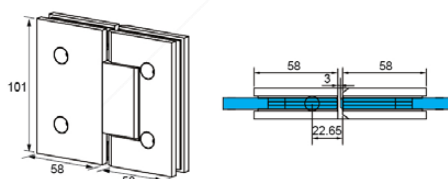




**LSH S9804 (GG) 90°  
CHROME POLISH**

Available : • Satin Brass  
• Brush Gun Metal




Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 65 Kg / pairs



**LSH S9805 (GG) 135°  
BRUSH GUN METAL**

Available : • Chrome Polish  
• Satin Brass

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 65 Kg / pairs






## GLASS CLIP - S SERIES



**LGC S980 (GW) 90°  
BRUSH GUN METAL**

Available : • Satin Brass  
• Chrome Polish




Material : Brass  
Door Thickness : 10 & 12 mm



**LGC S980 (GG) 90°  
SATIN BRASS**

Available : • Chrome Polish  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm






## SHOWER HINGE LUXURIOUS - T SERIES



**LSH T9701 (GW) 90°  
CHROME POLISH**

Available : • Satin Brass  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 50 Kg / pairs











**LSH T9702 (GW) 90°  
CHROME POLISH**  
Available : • Satin Brass  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 50 Kg / pairs






**LSH T9703 (GG) 180°  
BRUSH GUN METAL**  
Available : • Satin Brass  
• Chrome Polish

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 50 Kg / pairs






**LSH T9704 (GG) 90°  
CHROME POLISH**  
Available : • Satin Brass  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 50 Kg / pairs



**LSH T9705 (GG) 135°  
SATIN BRASS**  
Available : • Chrome Polish  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm  
Capacity Max : 50 Kg / pairs






## GLASS CLIP - T SERIES






**LGC T970 (GG) 90°  
BRUSH GUN METAL**  
Available : • Chrome Polish  
• Satin Brass

Material : Brass  
Door Thickness : 10 & 12 mm



**LGC T970 (GW) 90°  
SATIN BRASS**  
Available : • Chrome Polish  
• Brush Gun Metal

Material : Brass  
Door Thickness : 10 & 12 mm





## SHOWER HINGE 93 SERIES

Capacity max : 50kg/pair



### HEAVY DUTY

**SH 9301 (GW) CP**  
Glass to wall hinge  
Material : Brass





8-12 mm glass thickness



### HEAVY DUTY

**SH 9303 (180) CP**  
Glass to glass 180° hinge  
Material : Brass





8-12 mm glass thickness

## SHOWER HINGE 82 SERIES



**SH MF8201 SSS**  
Glass to wall hinge  
Material : Stainless Steel SUS 304





8-10 mm glass thickness

## SHOWER HINGE 83 SERIES



**SH 8331 CP**  
Floor to glass hinge  
Material : Brass





8-10 mm glass thickness

## SHOWER HINGE 87 SERIES (ADJUSTABLE)



**ASH 8701 CR (GW) CP**  
Glass to wall hinge  
Material : Brass



8-10 mm glass thickness

## SHOWER HINGE 77 SERIES



**SH 7701 (GW) CP**  
Glass to wall hinge  
Material : Brass





Available color :  
**SH 7701 (GW) MATT BLACK**



**SH 7701 (GW) GUN METAL**





**SH 7701 (GW) BLACK PEARL**



8-10 mm glass thickness



**SH 7702 (GW) CP**  
Glass to wall hinge  
Material : Brass





8-10 mm glass thickness



**SH 7703 (180) CP**  
Glass to glass 180° hinge  
Material : Brass





Available color :  
**SH 7703 (180) MATT BLACK**



8 -10 mm glass thickness



**SH 7704 (90) CP**  
Glass to glass 90° hinge  
Material : Brass





8 -10 mm glass thickness



**SH 7705 (135) CP**  
Glass to glass 135° hinge  
Material : Brass



Available color :  
**SH 7705 (135) MATT BLACK**



8 -10 mm glass thickness

## SHOWER HINGE 54 SERIES





### SH 5401 (GW) PSS

Glass to wall fixed hinge  
Material : Stainless Steel SUS 304



Available color :  
**SH 5401 (GW) MATT BLACK**

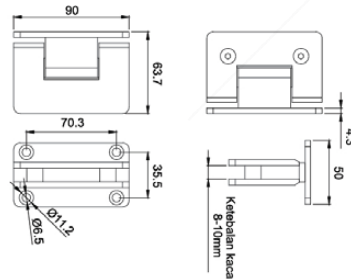

8 -10 mm glass thickness





### SH 5403 (GG) 180 PSS

Glass to glass 180° hinge  
Material : Stainless Steel SUS 304



Available color :  
**SH 5403 (GG) MATT BLACK**

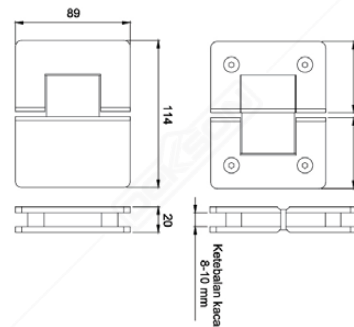

8 -10 mm glass thickness

## SHOWER HINGE 53 SERIES





### SH 5301 (GW) PSS

Glass to wall fixed hinge  
Material : Stainless Steel SUS 304



Available color :  
**SH 5301 (GW) MATT BLACK**



8 -10 mm glass thickness





### SH 5303 (GG) 180 PSS

Glass to glass 180° hinge  
Material : Stainless Steel SUS 304



Available color :  
**SH 5303 (GG) MATT BLACK**





8 -10 mm glass thickness



### SH 5305 (GG) 135 PSS

Glass to glass 135° hinge  
Material : Stainless Steel SUS 304




8 -10 mm glass thickness




**MATERIAL : STAINLESS STEEL SUS 304**




**PIPE TRACK**  
1200 mm Long

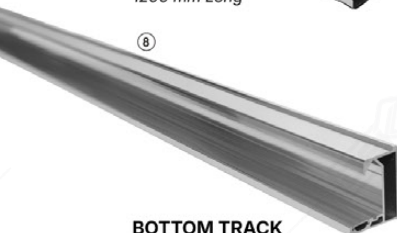


**BOTTOM TRACK**  
1200 mm Long




PIPE CORNER  
FITTING+ TOP  
STOPPER




PIPE SLEEVE+  
TOP STOPPER




PIPE SLEEVE+  
BUMPER




**BOTTOM STOPPER**  
(2 pcs)



**HANGING WHEEL**  
(2 pcs)

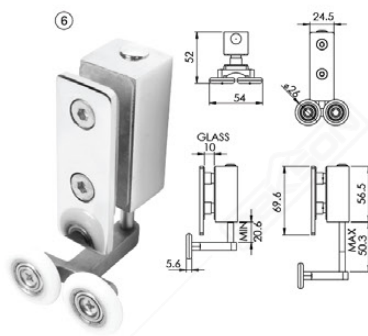



**BOTTOM WHEEL**  
(2 pcs)

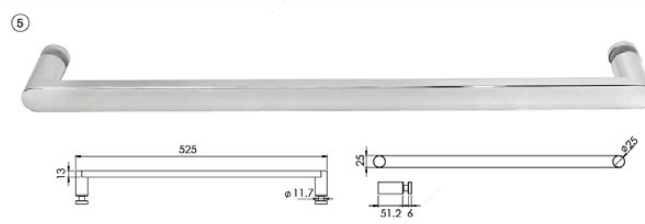

**PULL HANDLE**


## ILLUSTRATIONS

Capacity Max : 90 Kg  
Glass Thickness : 10 mm

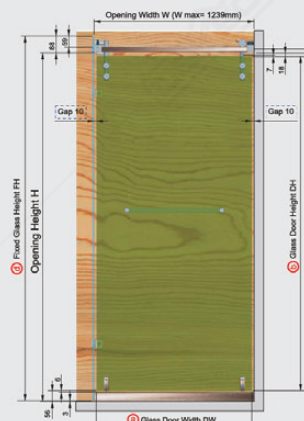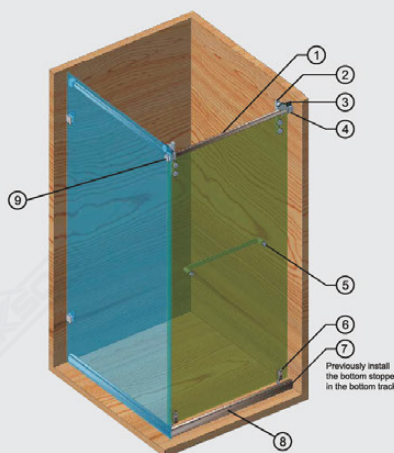

# SLIDING SHOWER


SD S001 COMP + TRACK

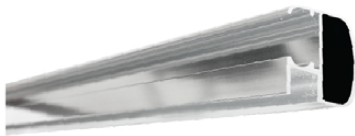

**TOP TRACK**


SD S001 - 01A

2000 mm Long




**DOOR KNOB**

SD S001- 07 (1 pc)




**FLOOR GUIDE**

SD S001-03 (1 pc)




**KNOB CLAMP ROLLER**

SD S001 - 04 (2 pcs)




**ROLLER STOPPER**

SD S001-03 A (2 pcs)




**MOUNTING BRACKET**

SD S001-02A (2 pcs)




**TRACK CONNECTING**

SD S001- 02 90 DEGREE





\*To be order separately

## ILLUSTRATIONS

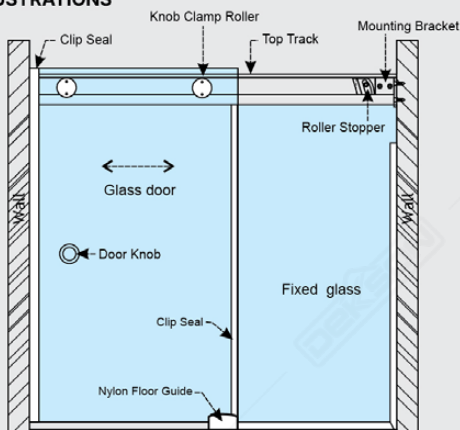

Capacity Max : 50 kg  
Glass Thickness : 8 ~ 10 mm  
Height Max : 2100 mm

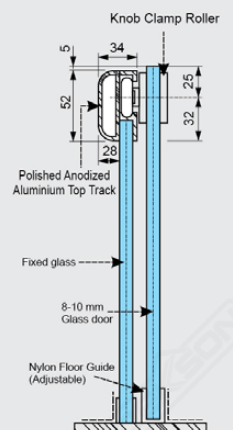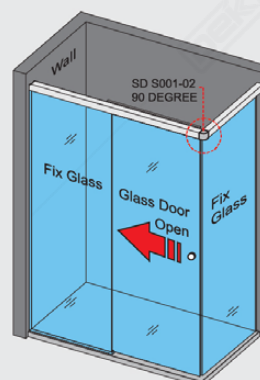


# SLIDING SHOWER

## SS02 ACC PSS


MATERIAL : STAINLESS STEEL SUS 304




**FLOOR GUIDE**  
(1 pc)




**TRACK HOLDER FOR FIXED PANEL**  
(2 pcs)




**ROLLER**  
(2 pcs)





**TRACK HOLDER FOR WALL**  
(2 pcs)




**STOPPER**  
(2 pcs)



**ANTI LIFT**  
(2 pcs)

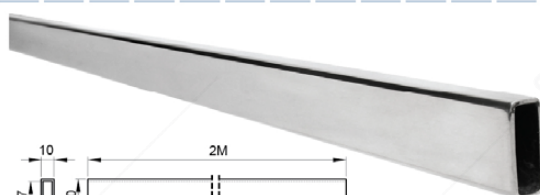


**SS02 TRACK PSS**  
2000 mm Long




**SS02-13 90 DEGREE PSS**



\*to be ordered separately




**TRACK HOLDER FOR FIXED PANEL**  
(2 pcs)



### ILLUSTRATIONS

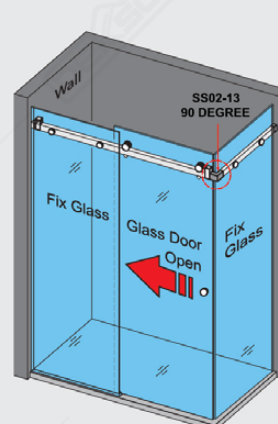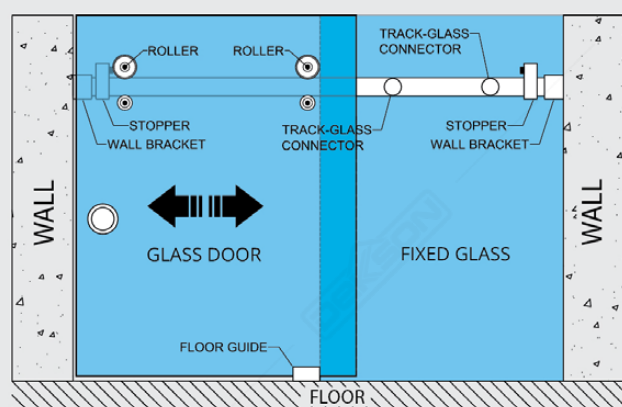

Capacity Max : 65 kg  
Glass Thickness : 8 ~ 10 mm  
Height Max : 2000 mm

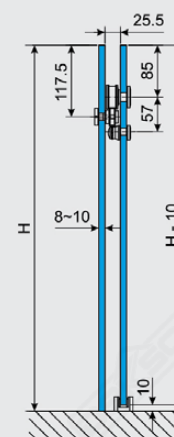



# SLIDING SHOWER

SOFT (OPEN+CLOSE) SS816



**TOP ROLLER**  
(2 pcs)



**HANDLE**

## SS816 (WW) CP

Available color : ORB



**180° GLASS TO SLIDING  
TRACK CONNECTOR**



**90° GLASS TO SLIDING  
TRACK CONNECTOR**  
Left Or Right



**WALL MOUNT BRACKET**  
Left Or Right



**THRESHOLD HOLDER TO WALL**  
Left Or Right



**FLOOR GUIDE**  
Left Or Right



**THRESHOLD HOLDER TO GLASS**  
Left Or Right

## SOFT (CLOSE+OPEN) SS816 TRACK CP

Available color : ORB



**KIT FOR SOFT CLOSING**



**CLIP SEAL**  
(1934 MM)



**THRESHOLD**  
(640 MM)





**U-CHANNEL FOR FIX GLASS**  
(2000 MM + 573 MM)




**UPPER TRACK + COVER**  
(1230 MM)

## ILLUSTRATION


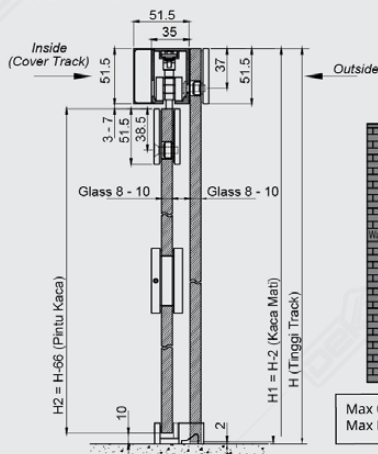


Max Opening Width : 1241 mm  
Max Door Height : 2000 mm

**LEFT TO OPEN WALL TO GLASS**  
Available : RIGHT



**RIGHT TO OPEN WALL TO WALL**  
Available : LEFT





# CUBICAL SYSTEM FOR TOILET

## For Offices and Public Spaces

A comfortable toilet in public spaces is not only needed, but expected. Dekkson cubical system set for toilet provides an all-in package that includes every architectural hardware needed to support a modern toilet cubicle. From the cubical stand to glass clip, everything is manufactured to last for a long period of time.

## OTHER ACCESSORIES

①



GC 018 (GW) PSS

②



GC 018 (GG) PSS

③



SH 5303 (GG) 180 PSS  
Material : SUS 304

④



KT SOLID 304 (160MM) SSS

⑤



IL 8620 CP + 861C CP KEEPER

⑥



GH 25-01 CP

⑦



GH 25-02 CP

⑧



GH 25-05 CP

⑨



GH 25-04 CP

⑩





PH DL814 25X(475/175)X(450X150) PSS  
Material : SUS 304

⑪



DK AL82803 CP  
Material : Aluminium


## ILLUSTRATIONS

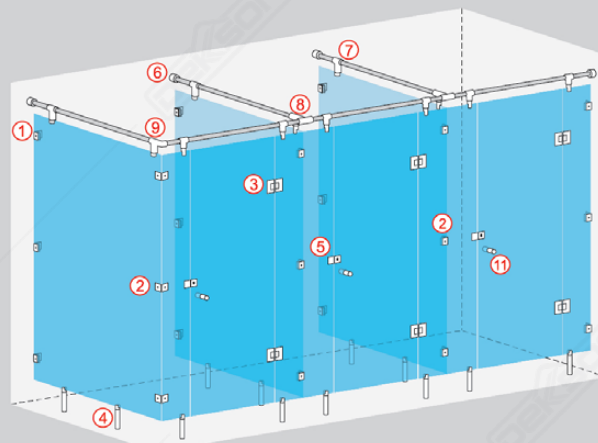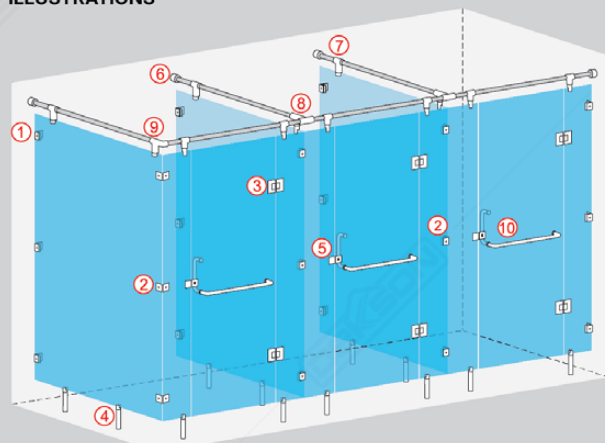


## CUBICAL TOILET



**CUBICAL TOILET**  
KT 304 (1600 MM) HD SSS  
*Glass to floor applications*




**CUBICAL TOILET**  
CT 001 (8-10MM) SSS  
*Glass to floor applications*  
Available Color : PSS

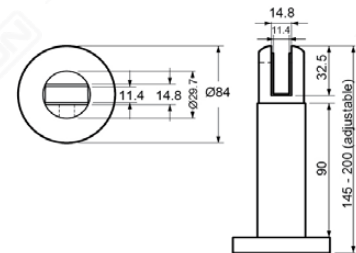


## GLASS HOLDER




**GLASS HOLDER**  
GH 19-01 CP




**GLASS HOLDER**  
GH 19-02 CP




**GLASS HOLDER**  
GH 19-03 CP







**GLASS HOLDER**  
GH 25-01 CP




**GLASS HOLDER**  
GH 25-02 CP



**GLASS HOLDER**  
GH 25-03 CP



**GLASS HOLDER**  
GH 25-04 CP

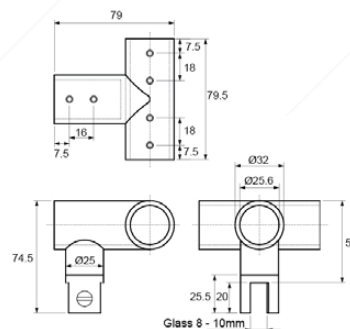



**GLASS HOLDER**  
GH 25-05 CP

## GLASS CLIP




**GLASS CLIP GC Z-15G CP**  
Glass to wall applications



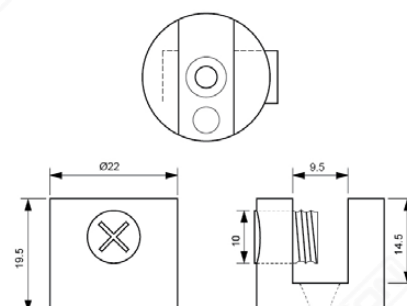






**GLASS CLIP**  
GC BL002 SN  
*Glass to wall applications*

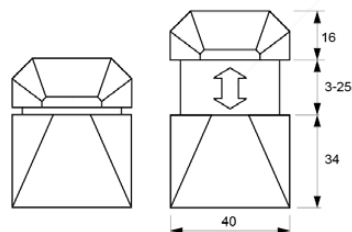



**GLASS CLIP**  
GC BL003 SN  
*Glass to wall applications*




**GLASS CLIP**  
GC D009 SN  
*Glass to wall applications*

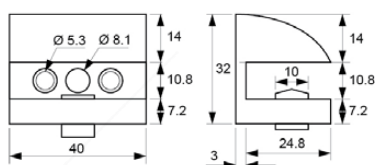

**GLASS CLIP**  
GC U8541 PSS  
*Glass to wall applications*




**GLASS CLIP**  
GC U800 AL CP  
*Glass to floor applications*

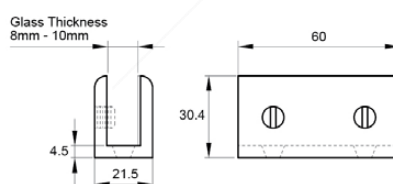









**GLASS CLIP**  
U820 PSS  
*Glass to wall applications*

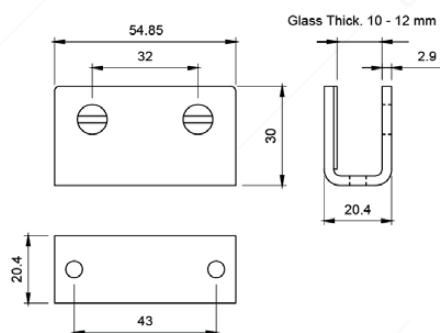

**GLASS CLIP**  
GC 018 (GW) PSS  
*Glass to wall applications*





**GLASS CLIP**  
GC 018 (GG) PSS  
*Glass to glass applications*





**GLASS CLIP**  
GC 832 CP  
*Glass to glass applications*



Available color :  
GC 832 CP MATT BLACK



**GLASS CLIP**  
GC 833 CP  
*Glass to wall applications*




# ADVERTISING FITTING

## For Extra Convenience and Functionality

Aside of the essentials, Dekkson also provide miscellaneous products for various extra functionality. Advertising fitting, mohair, clip seal, and various types of sealant are available, so contractors can freely 'play' glass elements in their buildings.




### ILLUSTRATIONS

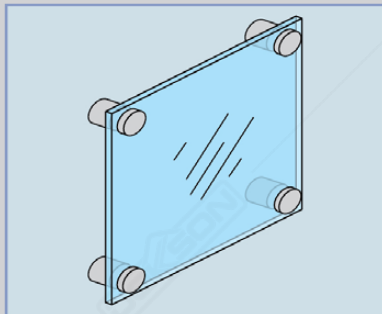

#### Wall Application

Material : Stainless Steel

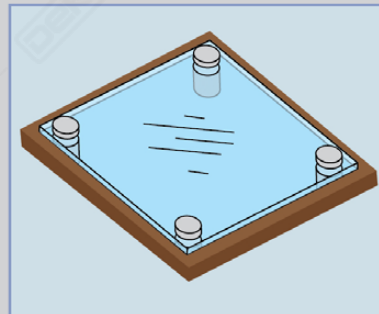

#### Table Application


Material : Stainless Steel



#### ADVERTISING FITTING

ADV 8626 19x30MM SSS  
Glass to wall applications


Available :  
19 X 40MM  
19 X 50MM  
19 X 60MM  
19 X 70MM



#### ADVERTISING FITTING

ADV 8626 25x40MM SSS  
Glass to wall applications


Available :  
25 X 30MM  
25 X 50MM  
25 X 60MM  
25 X 70MM



#### ADVERTISING FITTING

ADV 8626 30x50MM SSS  
Glass to wall applications

Available :  
30 X 30MM  
30 X 50MM  
30 X 60MM  
30 X 70MM






#### ADVERTISING FITTING

ADV 19x30MM SSS  
Glass to wall applications


Available :  
19 X 40MM  
19 X 50MM  
19 X 60MM  
19 X 70MM

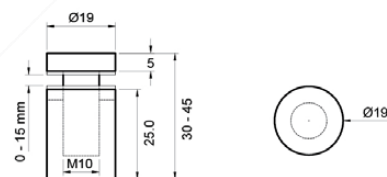

#### ADVERTISING FITTING

ADV 25x30MM SSS  
Glass to wall applications


Available :  
25 X 40MM  
25 X 50MM  
25 X 60MM  
25 X 70MM

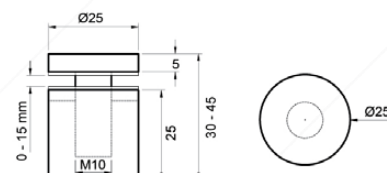

#### ADVERTISING FITTING

ADV 30x30MM SSS  
Glass to wall applications


Available :  
30 X 40MM  
30 X 50MM  
30 X 70MM

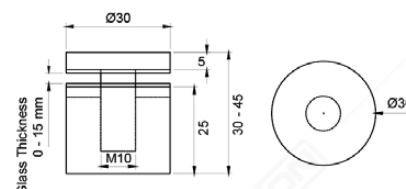

#### ADVERTISING FITTING

ADV G01 32x20MM SSS\*  
Glass to wall applications


Available :  
32 X 10MM\*  
32 X 30MM\*  
32 X 40MM\*  
32 X 50MM\*



#### ADVERTISING FITTING

ADV G03 32x30MM SSS\*  
Glass to wall applications

Available :  
32 X 10MM\*  
32 X 20MM\*  
32 X 40MM\*  
32 X 50MM\*  
40 X 80MM\*  
40 X 100MM\*

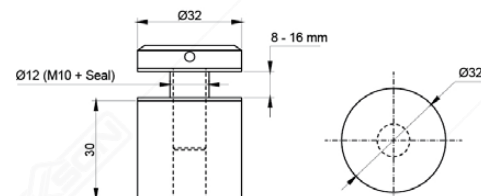


Material : Stainless Steel SUS 304



#### ADVERTISING FITTING

ADV 304 G001 ADJUST SSS  
Glass to wall applications

Material : Stainless Steel SUS 304


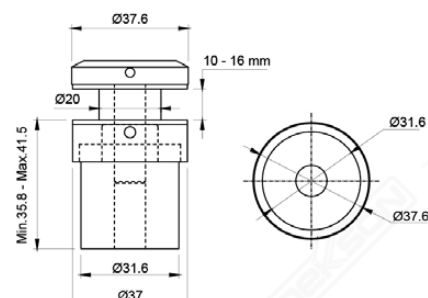


# STAIRCASE RAILING



MATERIAL : STAINLESS STEEL SUS 304




SCG 01 DOUBLE SSS

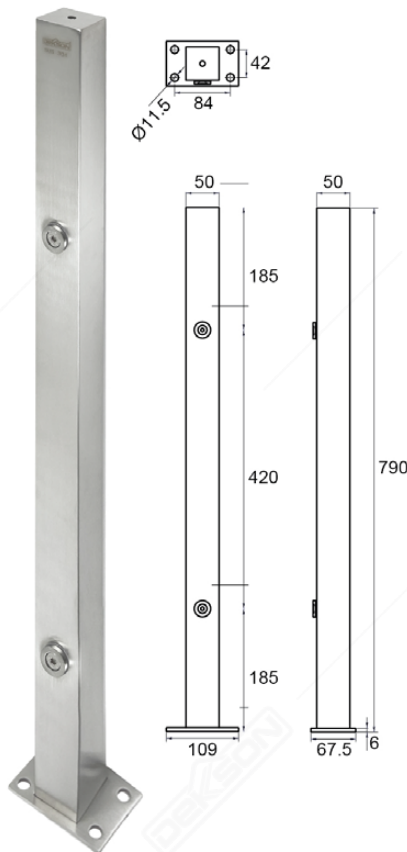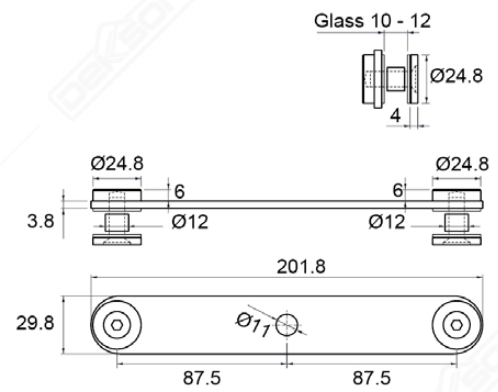

SCR 04 830 SSS

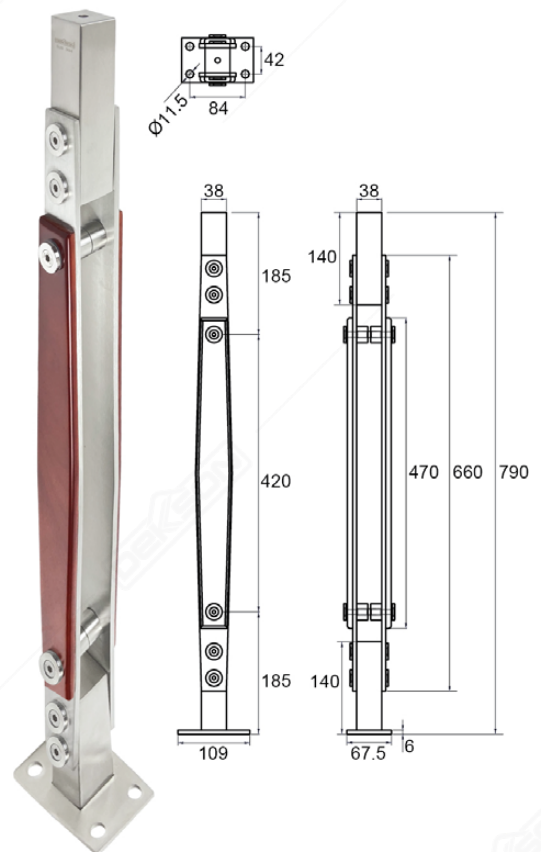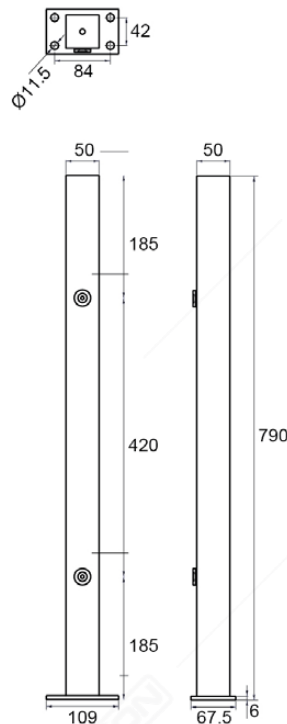


SCR 36 830 SSS+WOOD

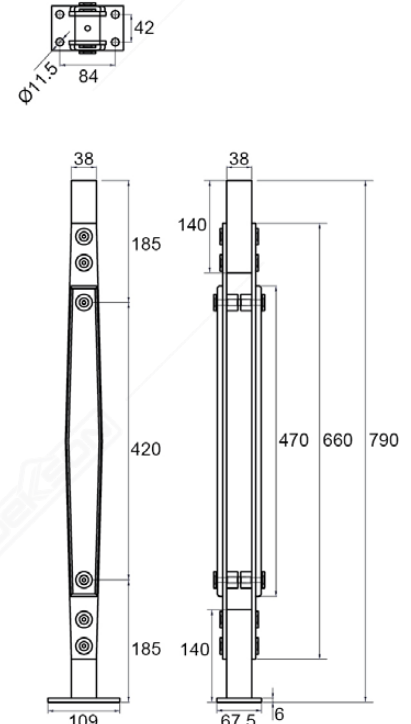







**SCG 01 SINGLE SSS**

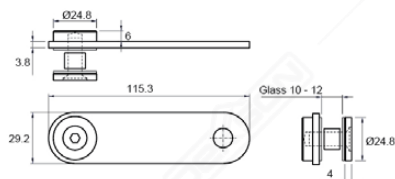


**SCH 0312 RW STRAIGHT SSS**  
Available: SCH 0312 RW OVAL SSS




**SCH 01 OVAL SSS**

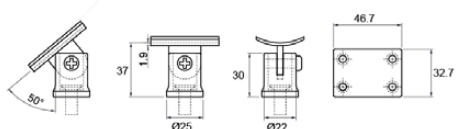


**SCH 01 STRAIGHT SSS**



**GLASS HOLDER BANISTER**  
GH 14-01 OVAL SSS  
Available: GH 14-01 STRAIGHT SSS




**GC ST001 SSS**  
Available: GC ST001 MATT BLACK

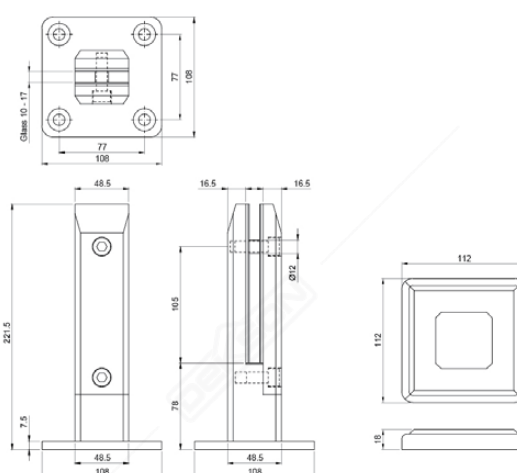





**MOHAIR SIL**  
0.48X0.9X250M BLACK\*




**MOHAIR SIL**  
0.69X0.7X200M BLACK\*



**SMALL MOHAIR SIL**  
0.69X0.5X200M GREY  
Available : BLACK




**BIG MOHAIR SIL**  
1.1X0.7X175M BROWN  
Available : BLACK, GREY



## CLIP SEAL


### CLIP SEAL MAGNETIC CS 100

10x2.2M (90/180) WH

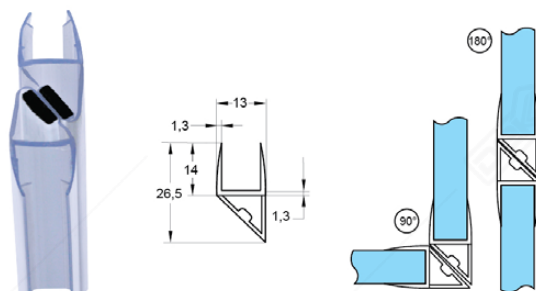


### CLIP SEAL MAGNETIC CS 110

10x2.2M (135/180) WH

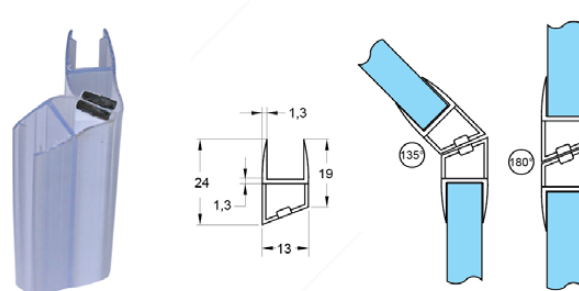


### CLIP SEAL CS 8910

10x2.2M OVAL

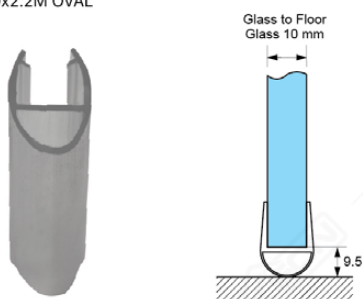


### CLIP SEAL CS 8920


10x2.2M OVAL




### CLIP SEAL CS BS 2.2M

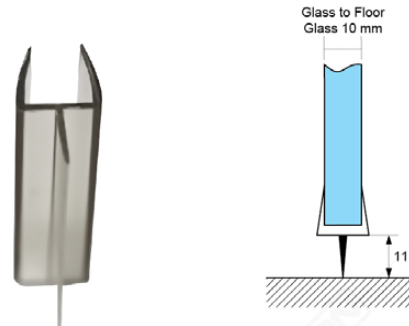

### CLIP SEAL CS SS 2.2M



### CLIP SEAL CS OW 2.2M



### CLIP SEAL WITH BRUSH CSB 001


10x2.2M OVAL\*

Available : 12x2.2M\*




### CLIP SEAL CS SS

(10/12MM) 2.5M\*

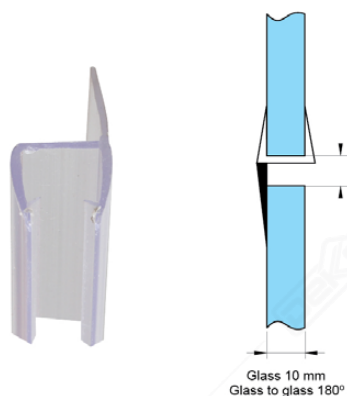

### CLIP SEAL BS


(10/12MM) 2.5M\*

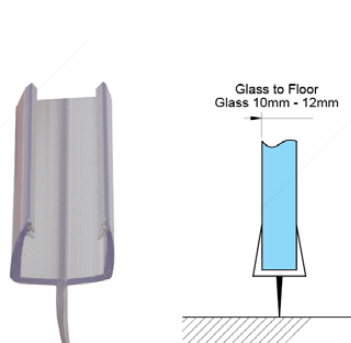


### CLIP SEAL WITH BRUSH CSB 002


10x2.2M OVAL\*

Available : 12x2.2M\*  
12x3M\*

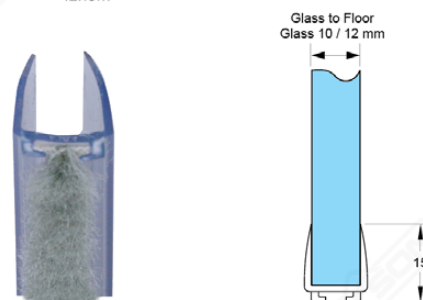




**GSC 1S**  
Max Capacity : 75 kg

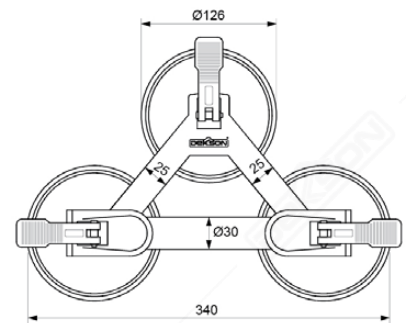

**GSC 3S**


## ILLUSTRATIONS

### VERTICAL

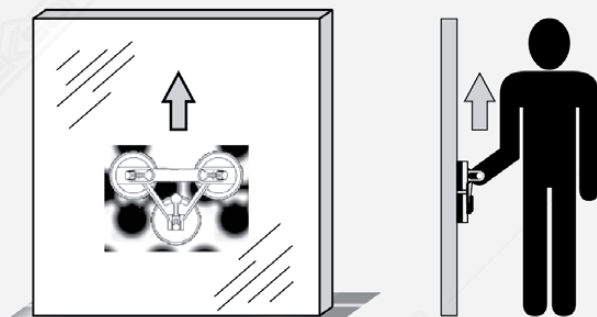

MAX CAPACITY : 150 KG

### HORIZONTAL

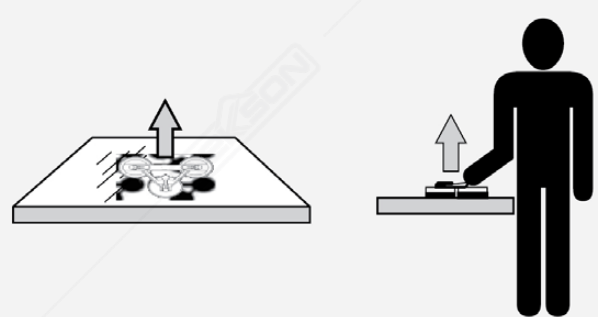

MAX CAPACITY : 130 KG



# SILICONE SEALANT

Every great finish starts with a reliable seal. Dekkson Silicon Sealant offers superior adhesion, excellent elasticity, and long-term protection against water and weather damage. Perfect for both interior and exterior use, it delivers a neat, professional result for every project.

## SILICONE

### DEKKSON NEUTRAL SILICONE SEALANT

#### DESCRIPTION :

Dekkson Neutral Silicone Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

#### APPLICATIONS :

General Glazing : Masonry, Concrete, Ceramics, Stone, Glass, Aluminium, Most Plastic, Wood, Brick, Zincalume, Galvanized Iron.

General Sealing : Containers, Automobiles, Rain Water Goods, Roofing, Joints in Building and Civil Engineering.


DIY Applications : Gutter, Air-Conditioning, Sanitary, Car, Boat and Other Marine Industry uses.

Electronics Sealing : As Sealants in The Electrical and Electronics Industry.


#### SPECIFICATION :

|                   |                     |
|-------------------|---------------------|
| Curing System     | : Neutral (Oxime)   |
| Appearance        | : Non-Sagging Paste |
| Odour             | : Low Oxime Smell   |
| Specific Gravity  | : $1.03 \pm 0.05$   |
| Shore A Hardness  | : 24 Approx.        |
| Elongation        | : 400% Approx.      |
| Tensile Strength  | : 1.20 MPa Approx.  |
| Tack free Time    | : Within 15 Minutes |
| Application Temp. | : -20°C to 50°C     |
| Service Temp.     | : -50°C to 150°C    |
| Self Life         | : 12 Months         |
| Netto             | : 300 ml            |

Color : NA, BK, DB, Light Grey, White  
 \* Joint Size Minimum 3 mm x 3 mm  
 \* Joint Size Maximum 30 mm




Concrete




Ceramics



Stone




Glass



Aluminium



Zincalume



Wood



Brick

### DEKKSON EXTENDED SILICONE SEALANT

#### DESCRIPTION :

Dekkson Extended Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

#### APPLICATIONS :

General Glazing : Glass, Plastic, Channel or Stop.

Curtain Wall Sealing : Glass, Steel, Granite, and Plastic.

General Sealing : Sheet Metal, Skylights, Ventilators, Air-Conditioning

#### SPECIFICATION :

|                   |                     |
|-------------------|---------------------|
| Curing System     | : Acetoxy           |
| Appearance        | : Non-Sagging Paste |
| Odour             | : Vinegar Smell     |
| Specific Gravity  | : $0.96 \pm 0.05$   |
| Shore A Hardness  | : 18 to 26 Approx.  |
| Elongation        | : 300% Approx.      |
| Tensile Strength  | : 1.4 MPa Approx.   |
| Tack free Time    | : 15 Minutes        |
| Application Temp. | : -20°C to 50°C     |
| Service Temp.     | : -40°C to 100°C    |
| Self Life         | : 12 Months         |
| Netto             | : 300 ml            |


Color : NA, BK, BA, WH, Light Grey  
 \* Joint Size Minimum 3 mm x 3 mm  
 \* Joint Size Maximum 30 mm




Plastic



Granite



Sheet Metal




Ventilators



Air-Conditioning



Channel or Stop



Glass



Skylights





## SILICONE DKS 8793 ST (STRUCTURAL)

### DESCRIPTION :

DKS-8793 ST SILICONE is a high performance, 100% neutral silicone architectural grade silicone rubber, designed specifically for structural bonding and protective glazing applications.

### APPLICATIONS :

Structural bonding and glazing of curtain wall.

### SPECIFICATION :

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| Curing System     | : Neutral (Oxime)                                                  |
| Appearance        | : Non-Sagging Paste                                                |
| Odour             | : Low Oxime Smell                                                  |
| Specific Gravity  | : Clear 1.00 g/cm <sup>3</sup> and Coloured 1.37 g/cm <sup>3</sup> |
| Shore A Hardness  | : 48 Approx.                                                       |
| Elongation        | : 200% Approx.                                                     |
| Tensile Strength  | : 1.20 MPa Approx.                                                 |
| Tack free Time    | : 30 Minutes                                                       |
| Application Temp. | : -4°C to 40°C                                                     |
| Service Temp.     | : -27°C                                                            |
| Self Life         | : 12 Months                                                        |
| Netto             | : 300 ml                                                           |

Color : Clear, Black, D. Brown, White, Light Grey  
 \* Joint Size Minimum 3 mm x 3 mm  
 \* Joint Size Maximum 30 mm



Structural



Curtain Wall



ACP




Aluminium Window



Spider Fitting



Concrete



Brick



Skylights



## CONSTRUCTION ADHESIVE


### DESCRIPTION :

is a versatile general purpose construction adhesive suitable for bonding a wide variety of building materials for internal and external applications.


### SPECIFICATION :

|                                   |                                                                       |
|-----------------------------------|-----------------------------------------------------------------------|
| Appearance                        | : Thixotropic paste like consistency                                  |
| Solids Content                    | : Approx. 75%                                                         |
| Open Time (Reposition)            | : 10 to 30 minutes depending on temperature and method of application |
| Sag Resistance (AS2329-1999)      | : < 4mm                                                               |
| Specific Gravity                  | : 1.12±0.02                                                           |
| Maximum Bond Strength             | : Generally between 48 to 72 hours depending on application.          |
| Shear Bond Strength (AS2329-1999) | : >2.6Mpa ( after 24 hours )                                          |
| VOC                               | : 310g/L                                                              |
| Netto                             | : 300ml                                                               |


Color : White  
 \* Joint Size Minimum 3 mm x 3 mm  
 \* Joint Size Maximum 30 mm



Frame



PVC




Wallpaper



Glass




Mirror



Metal



Wood



Brick



## SILICONE SAUSAGE



### SILICONE DKS SAUSAGE NEUTRAL 8610

Available : WHITE, BLACK, DARK BROWN, BROWN, LIGHT GREY  
Netto : 600 ml

#### SPECIFICATION :

|                   |                                                  |
|-------------------|--------------------------------------------------|
| Curing System     | : Neutral (Oxime)                                |
| Appearance        | : Non-Sagging Paste                              |
| Odour             | : Low Oxime Smell                                |
| Specific Gravity  | : $1.03 \pm 0.05$                                |
| Shore A Hardness  | : 24 Approx.                                     |
| Elongation        | : 400% Approx.                                   |
| Tensile Strength  | : 1.20 MPa Approx.                               |
| Tack free Time    | : Within 15 Minutes                              |
| Application Temp. | : $-20^{\circ}\text{C}$ to $50^{\circ}\text{C}$  |
| Service Temp.     | : $-50^{\circ}\text{C}$ to $150^{\circ}\text{C}$ |
| Self Life         | : 12 Months                                      |
| Netto             | : 300 ml                                         |

Color : NA, BK, DB, Light Grey, White  
\* Joint Size Minimum 3 mm x 3 mm  
\* Joint Size Maximum 30 mm



### SILICONE DKS 8793 ST

Available : WHITE, BLACK, DARK BROWN, BROWN, LIGHT GREY  
Netto : 600 ml

#### SPECIFICATION :

|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Curing System     | : Neutral (Oxime)                                                |
| Appearance        | : Non-Sagging Paste                                              |
| Odour             | : Low Oxime Smell                                                |
| Specific Gravity  | : Clear $1.00 \text{ g/cm}^3$ and Coloured $1.37 \text{ g/cm}^3$ |
| Shore A Hardness  | : 48 Approx.                                                     |
| Elongation        | : 200% Approx.                                                   |
| Tensile Strength  | : 1.20 MPa Approx.                                               |
| Tack free Time    | : 30 Minutes                                                     |
| Application Temp. | : $-4^{\circ}\text{C}$ to $40^{\circ}\text{C}$                   |
| Service Temp.     | : $-27^{\circ}\text{C}$                                          |
| Self Life         | : 12 Months                                                      |
| Netto             | : 300 ml                                                         |

Color : Clear, Black, D. Brown, White, Light Grey  
\* Joint Size Minimum 3 mm x 3 mm  
\* Joint Size Maximum 30 mm



## SILICONE GUN



### SILICONE GUN 8600

For Silicone Sausage Pack Only



### SILICONE GUN 8200

For Silicone Cartridge Tube Pack Only



AVAILABLE AT :

